
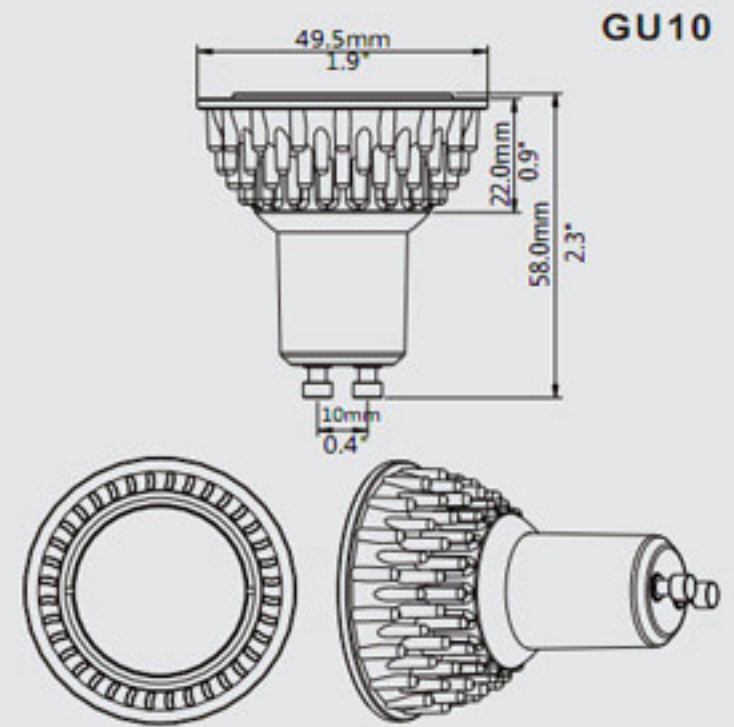
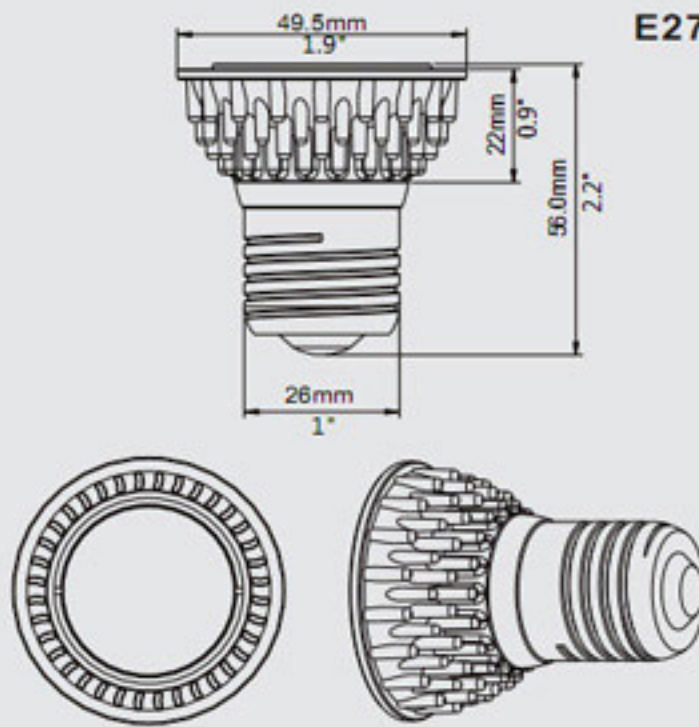


Dimensions (Unit: mm/inch)

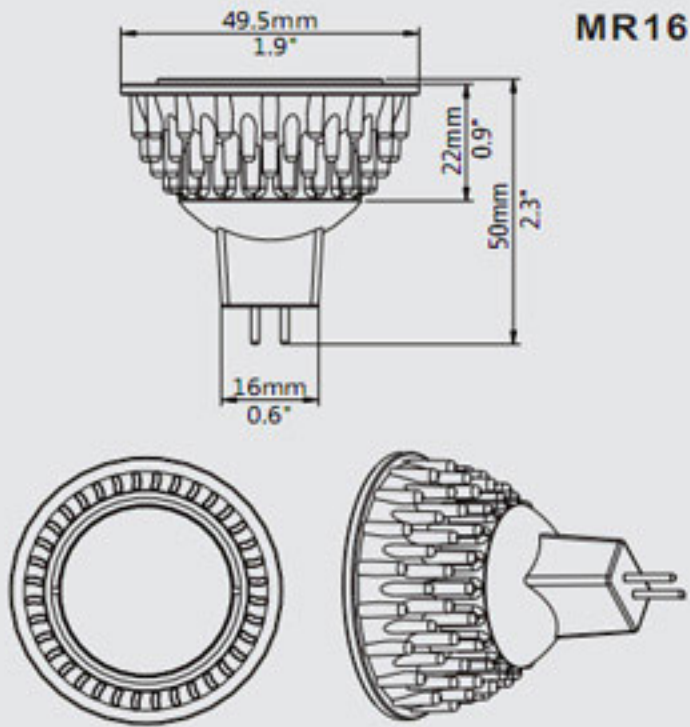

Specifications

Model Number	Shell Color	Color	LED Type	CCT	Power Consumption (W)	CRI	Lumen (lm ± 10%)	Voltage (V)	Beam Angle (degrees)	Weight (kg)
AR-006-AW-01WE27	Black	White	2835 SMD	5700-6300K	5	≥ 80	329	100-240V AC 50/60Hz	45°/90°	0.045
E27-006-AW-W-01	Silver			5700-6300K	5	≥ 80	329	100-240V AC 50/60Hz	45°/90°	
AR-006-AW-01WWE27	Black	Warm White		2800-3200K	5	≥ 80	327	100-240V AC 50/60Hz	45°/90°	
E27-006-AW-WW-01	Silver			2800-3200K	5	≥ 80	327	100-240V AC 50/60Hz	45°/90°	
AR-006-AW-01NWE27	Black	Natural White		4000-4500K	5	≥ 80	363	100-240V AC 50/60Hz	45°/90°	
E27-006-AW-NW-01	Silver			4000-4500K	5	≥ 80	363	100-240V AC 50/60Hz	45°/90°	
AR-006-AW-01WGU10	Black	White		5700-6300K	5	≥ 80	329	100-240V AC 50/60Hz	45°/90°	
GU10-006-AW-W-01	Silver			5700-6300K	5	≥ 80	329	100-240V AC 50/60Hz	45°/90°	
AR-006-AW-01WWGU10	Black	Warm White		2800-3200K	5	≥ 80	327	100-240V AC 50/60Hz	45°/90°	
GU10-006-AW-WW-01	Silver			2800-3200K	5	≥ 80	327	100-240V AC 50/60Hz	45°/90°	
AR-006-AW-01NWGU10	Black	Natural White		4000-4500K	5	≥ 80	363	100-240V AC 50/60Hz	45°/90°	
GU10-006-AW-NW-01	Silver			4000-4500K	5	≥ 80	363	100-240V AC 50/60Hz	45°/90°	
AR-006-D5-01WMR16	Black	White	5700-6300K	4.5	≥ 80	329	12V-24V AC/DC	45°/90°		
MR16-006-D5-W-01	Silver		5700-6300K	4.5	≥ 80	329	12V-24V AC/DC	45°/90°		
AR-006-D5-01WWMR16	Black	Warm White	2800-3200K	4.5	≥ 80	327	12V-24V AC/DC	45°/90°		
MR16-006-D5-WW-01	Silver		2800-3200K	4.5	≥ 80	327	12V-24V AC/DC	45°/90°		
AR-006-D5-01NWMR16	Black	Natural White	4000-4500K	4.5	≥ 80	363	12V-24V AC/DC	45°/90°		
MR16-006-D5-NW-01	Silver		4000-4500K	4.5	≥ 80	363	12V-24V AC/DC	45°/90°		