



Type: ASK/OOK Super-Heterodyne Transmitter Module

Model: CYT6

Description:


The CYT6 is an ASK transmitter module. CYT6 is designed by the saw resonator, with an effective low cost, small size, and simple-to-use for designing.



Vertical Type

Order Information:

Model NO.	Frequency
CYT6-315	315 MHz
CYT6-433	433.92 MHz

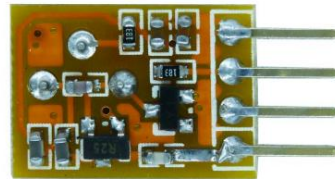

Parallel Type

Features:

- The range can be 500m when matching with CY11
- Operation voltage: VCC= 2.6 to 12V;
- Frequency: 315MHz/433.92MHz(custom frequency is available);
- High output power: 12dBm;
- Frequency tolerance: ± 75 KHz;
- Current: 12mA;
- Operating temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- Bit rate: <4.8kbps;

Application

- Car Security System
- Remote Keyless Entry
- Garage Door Controller
- Home Security
- Wireless Mouse
- Automation System

Pin Description

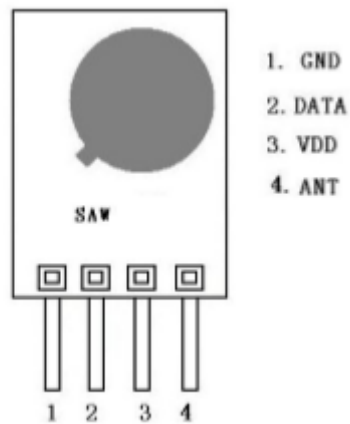


Figure1 CYT6 Shape & Pins

Pin-out as showed in figure 1 above

Pin	Name	Function
1	GND	Connect to negative power supply
2	DATA	Data connected to MCU
3	VDD	Positive Power Supply
4	ANT	Antenna Out

Note 1: ANT pin is a 50 ohm antenna input. The length is about:
23cm for 315MHz
17cm for 433.92MHz

Electrical Characteristics:

Condition: Ta=25°C Vcc=5.0V

Characteristics	Symbol	Condition	Value			Unit
			Min.	Typ.	Max.	
Frequency	Fc			315/433.92		MHz
Modulation Mode			ASK/OOK			
Output power		5V/50Ω		12		dBm
Data-rate				1.2		Kbps
Frequency Tolerate	Fc			±75		kHz
Current	IRC				12	mA
Working Voltage	VCC		2.6		12	V
Working Temperature	TC		-20		+70	°C

Mechanical Size: (Unit: MM)

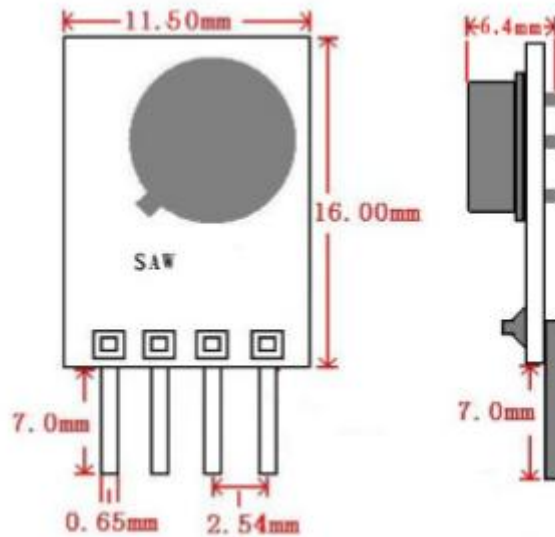


Figure2 CYT6 Dimension



For more information and assistance, please contact us as follows:

CY WIRELESS TECHNOLOGY LIMITED

Add: 1407, Block C, Tairan Building, 8th Tairan Road, Futian District,
Shenzhen, Guangdong Province, China

Website: www.rficy.com

Email: info@rficy.com