



PB22



SPECIFICATIONS


Circuit	:SPST
Current rating	:0.1A / 2A
Voltage rating	:24VDC/125VAC
Dielectric withstanding voltage	:1000VAC for 1 minute
Contact resistance	:50mΩ Max
Insulation resistance	:100MΩMin
Travel	:2.5mm±0.5mm
Operating Force	:400±50gf
Mechanical Life	:Over 100,000 cycles
Electrical Life	:Over 10,000 cycles
Manual Welding	:350°C for 3 seconds
Function	:OFF-ON
Operating temperature	: -20°C ~ +70°C
Level of protection	:IP67

MATERIAL:


Base: PA66, UL rated:94V-2 Min;
Cap: ABS;
Terminal: Copper, Golden plated ;
Nut: Brass, NI Plated .

FUNCTION

PANEL MOUNTING

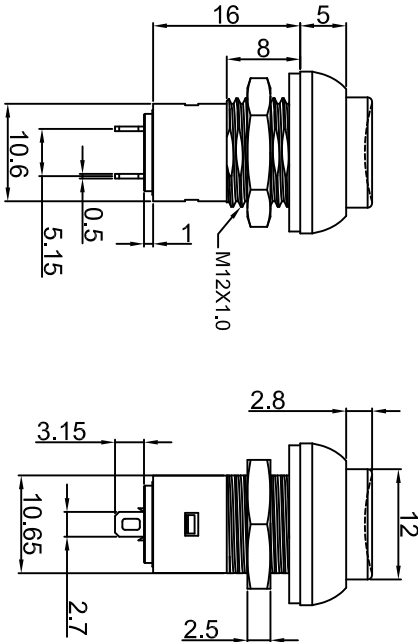

Note:
This product is strictly prohibited wave soldering and reflow soldering, please use the manual welding processing, temperature of 350°±5°and time is 3±0.5 seconds;

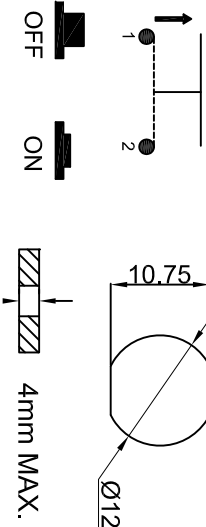

B	Black 黑色
W	White 白色
U	Blue 蓝色
G	Green 绿色
R	Red 红色
Cap Color (X) 上盖颜色 (X)	

A3	图面更新：端子采用镀金处理	2017.12.12	N/A	公差 TOLERANCES	X±0.3	XX±0.15	角度 ANGLE ±1°	单位	DIMENSION UNIT	mm.
A2	图面整理	2017.10.15	N/A	视角	VIEWING ANGLE	NONE	日期	DATE	品名	TITLE
A1	增加产品焊锡说明	2016.05.30	N/A	核 准	核 对	Sinc	2017.12.12	绘图	PB22-A-1B-N	DRAWING NO
A0	New Issue	2016.05.30	N/A	Richard	CHECKED BY		姜庆勇		PB22-A-1B-N	PB22-A-1B-N_CP_A3
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	DRAWN BY				