





PERFECT DISPLAY

Model No.:		GM22DFA
Display	Screen Size	21.5" VA
	Backlight type	
	Aspect Ratio	
	Brightness (Typical)	
	Contrast Ratio (Typical)	
	Resolution (Max.)	
	Response Time (Typical)	
	Viewing Angle (Horizontal/Vertical)	
	Color Support	
Signal input	Video Signal	
	Sync. Signal	
	Connector	
Power	Power Consumption	Typical 15W
	Stand By Power	
	Type	DC 12V 3A
	Power delivery	PD 15W (5V 3A)
Features	Plug & Play	
	Bezeless Design	
	Cabinet Color	
	VESA Mount	100x100mm
	Low Blue Ligth	
	Flicker Free	
	Over Drive	
	Audio	
Accessories		
MOQ		500
Price A+ grade (9: 1)		USD 48.5

PICTURES

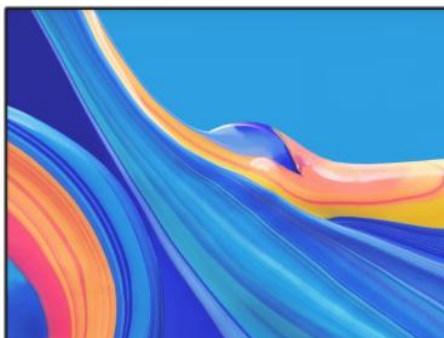

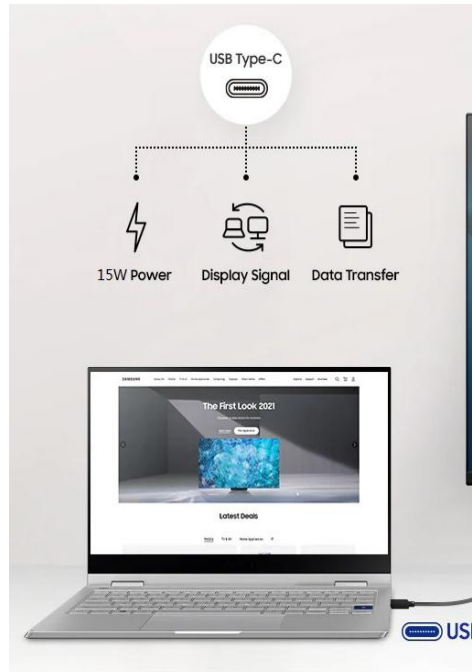

PERFECT DISPLAY TECH

SPECIFICATION WORKING STATI

Updated time: 2022.1

GW24DFA	GW27DFA
23.8" VA	27" VA

LED

16: 9

250 cd/m²

3000:1

1920 x 1080 @ 75Hz

4ms(OD)

178°/178° (CR>10)

16.7M, 8Bit, 72% NTSC

Analog RGB/Digital

Separate H/V, Composite, SOG

HDMI + DP+ USB-C

Typical 18W

Typical 22W

<0.5W

DC 12V 3A

DC 12V 3A

PD 15W (5V 3A)

PD 15W (5V 3A)

Supported

3 side Bezeless Design

Matt Black

100x100mm

100x100mm

Supported

Supported

Supported

2x2W


Power Supply, user's manual, HDMI cable

500

500

USD 57

USD 73





TECHNOLOGY CO., LTD

MON LED HDMI MONITOR

9.27, valid time: 30 days

GW27DQA
27" VA
4000:1
2560 x 1440 @ 75Hz
Typical 28W
DC 12V 3.5A
PD 15W (5V 3A)
100x100mm
500
USD 89









PERFECT DISPLAY

Model No.:		GW22DFI
Display	Screen Size	21.5" IPS
	Backlight type	
	Aspect Ratio	
	Brightness (Typical)	
	Contrast Ratio (Typical)	
	Resolution (Max.)	
	Response Time (Typical)	
	Viewing Angle (Horizontal/Vertical)	
	Color Support	
Signal input	Video Signal	
	Sync. Signal	
	Connector	
Power	Power Consumption	Typical 15W
	Stand By Power	
	Type	DC 12V 3A
	Power delivery	PD 15W (5V 3A)
Features	Plug & Play	
	Bezeless Design	
	Cabinet Color	
	VESA Mount	100x100mm
	Low Blue Ligth	
	Flicker Free	
	Over Drive	
	Audio	
Accessories		
MOQ		500

PICTURES

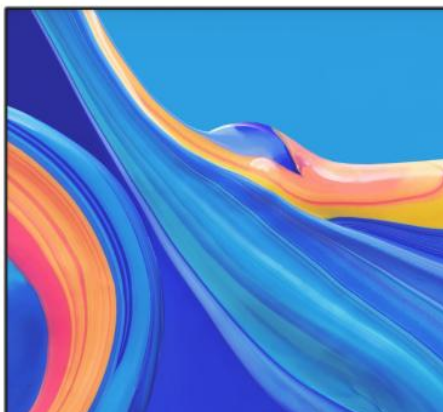

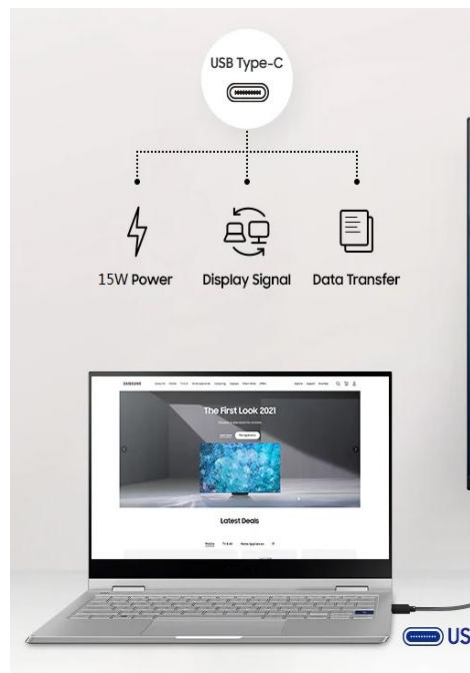

PERFECT DISPLAY TECH

SPECIFICATION WORKING STATION LED

Updated time: 2022.1

GW24DFI	GW27DFI
23.8" IPS	27" IPS
LED	
16: 9	
250 cd/m ²	
1000:1	
1920 x 1080 @ 75Hz	
3ms(OD)	
178°/178° (CR>10)	
16.7M, 8Bit, 72% NTSC	
Analog RGB/Digital	
Separate H/V, Composite, SOG	
HDMI + DP+ USB-C	
Typical 18W	Typical 22W
<0.5W	
DC 12V 3A	DC 12V 3A
PD 15W (5V 3A)	PD 15W (5V 3A)
Supported	
3 side Bezeless Design	
Matt Black	
100x100mm	100x100mm
Supported	
Supported	
Supported	
2x2W	
Power adapter, user's manual, HDMI cable	
500	500





TECHNOLOGY CO., LTD
27" USB C/HDMI MONITOR

9.27, valid time: 30 days

GW27DQI
27" IPS
2560 x 1440 @ 75Hz
Typical 28W
DC 12V 3.5A
PD 15W (5V 3A)
100x100mm
500



