

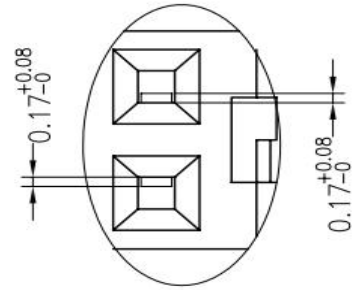
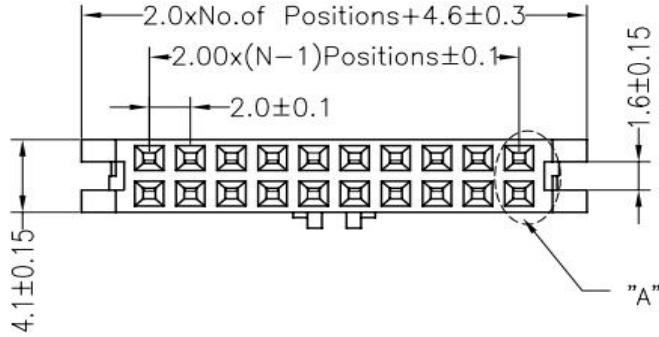



SPECIFICATIONS:

Rated Current	1.0AMP
Contact Resistance	20mΩ Max
Withstand Voltage	500V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass
Contact Plating	Au or SN Over Ni
Insulator Material	PBT -UL94V-0
Max. Processing Temp:	180°C for 30-60 seconds 200°C for 10 seconds




DETAIL "A"
Scale:3:1

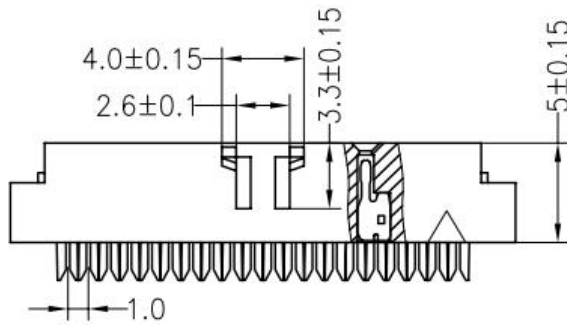

W=With Bump



N=Without Bump

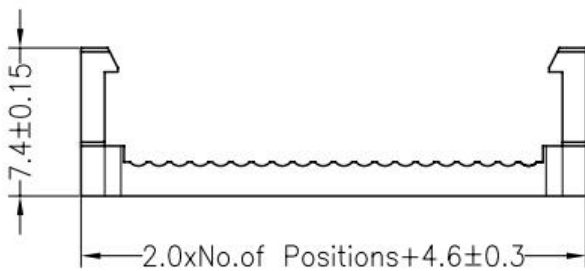

Ordering Information

HC Series	No.of Pin Per Row	Terminal Type	Contact	Plating Code	Insulator Option	Inner Code	Packing Code	End code
HC-IDC24	06P	Y	B	G0=Gold Flash	A=PBT	W=With Bump	T=Tube	01
2.0mm IDC	68P				C=PA6T	N=Without Bump	A=Tray	