

REV	DC/EC NUMBER	DESCRIPTION	DATE

TOP VIEW

SIDE VIEW

BOTTOM VIEW


Interface for TFT
(CN1)

1	NC
2	H_GND
3	NC
4	NC
5	H_GND
6	Lane0_N
7	Lane0_P
8	H_GND
9	AUX_CH_P
10	AUX_CH_N
11	H_GND
12	LCD_VCC
13	LCD_VCC
14	NC
15	LCD_GND
16	LCD_GND
17	HPD
18	BL_GND
19	BL_GND
20	BL_GND
21	BL_GND
22	BL_ENABLE
23	PWM_DIM
24	Hsync
25	NC
26	BL_PWR
27	BL_PWR
28	BL_PWR
29	BL_PWR
30	NC

TFT NOTE:

1. LCD TYPE: 15.6" 1366RGB*768,TFT,TN,NORMALLY WHITE
2. VIEWING DIRECTION:
WIDE VIEWING 50(L)/50(R)/30(U)/50(D)
3. BRIGHTNESS: 500cd/m2 TYP.450cd/m2 min. at
(ILED=120mA,VLED=25.2V~30.0V)
4. OPERATION TEMP.: 0°C~50°C
5. STORAGE TEMP.: -20°C~60°C
6. NON-MARK TOLERANCE is $\pm 0.3\text{mm}$
7. ROHS CPMPLAIN

LED CIRCUIT

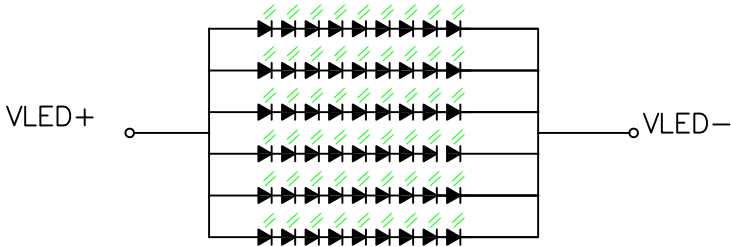

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION			
REFERENCE DIMENTION:	()				
APPROVED:	JOBS	MODEL NAME		3rd ANGLE	⊕
CHECKED:	ERIC	PART NAME		UNIT	mm
DESIGNED:	ISSCA	DRAWING NUMBER		SCALE	1:1
		METERIAL NUMBER		PAGE	1/1