


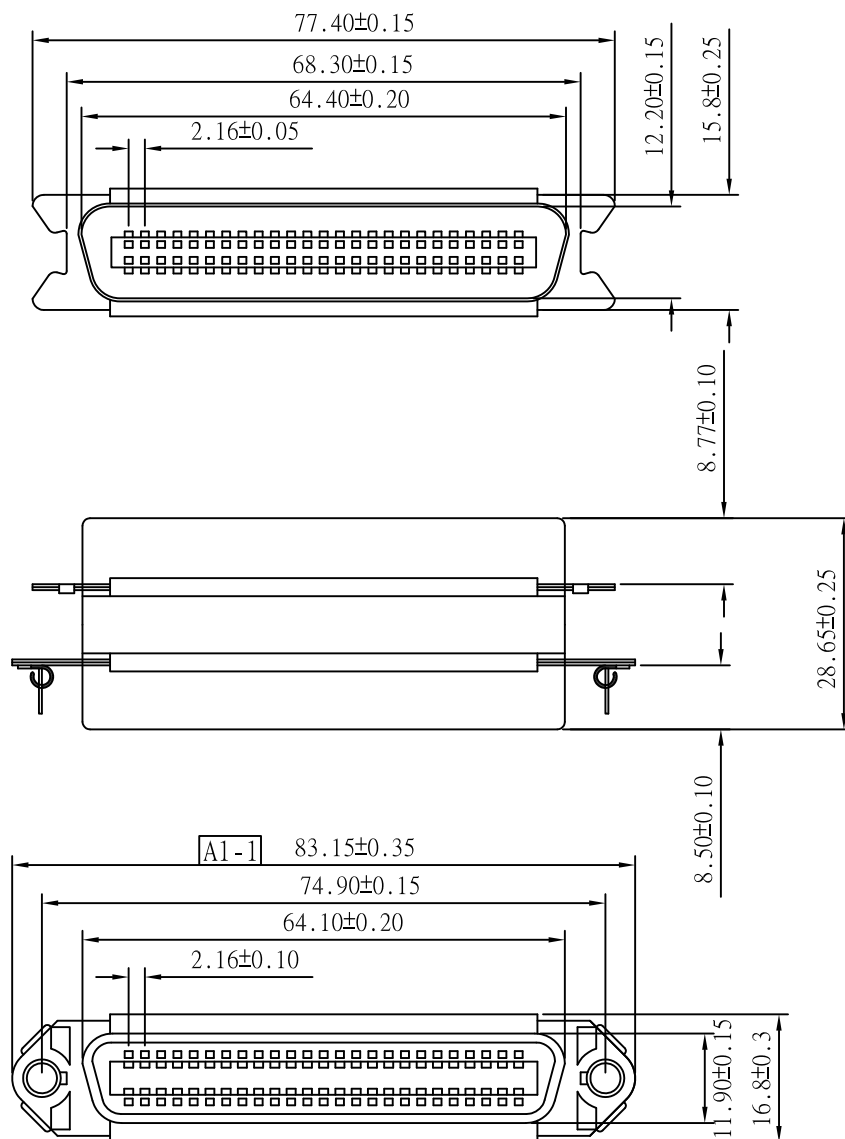

PIN OUT: 50Male

50Female

1	-----	1
2	-----	2
3	-----	3
4	-----	4
49	-----	49
50	-----	50
G	-----	G

ELECTRICAL TEST:

1. 100% Test (Open, short, miss wire)
2. Contact Resistance: 8 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot: 300V DC/0.5mA

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 VO (blue)

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Nickel Silver

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION



ORDER INFORMATION

CNX2-ES-5050-LF

SERIES | LEADFREE
50 TO 50 WAY
MALE TO FEMALE

DESCRIPTION: