






3D $\phi 3.6 \times 10$ RoHS COMPLIANT




LANSION

玻璃保险丝管(快断型)GLASS TUBE FUSE(FAST-ACTING) 250V/125V

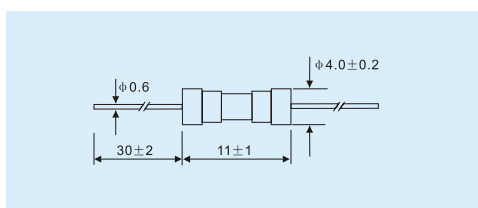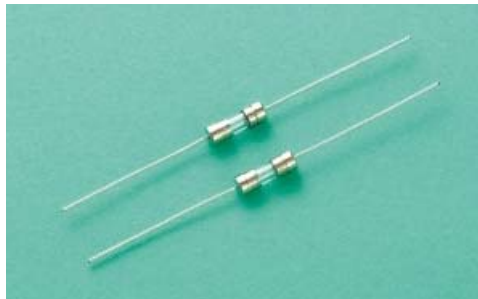

TIME-CURRENT CHARACTERISTICS
电流-时间曲线图

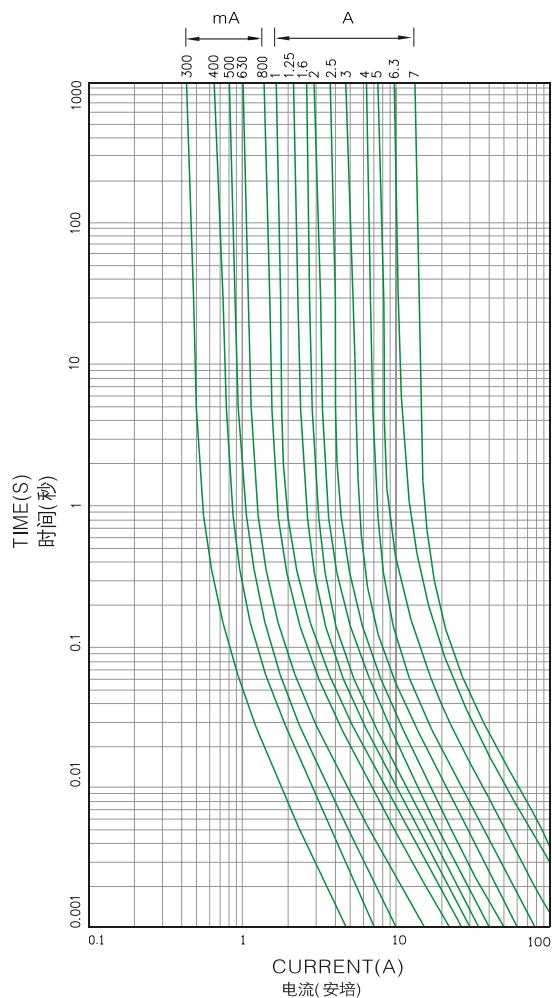

目录编号 CATALOG NO.	额定电流 AMPERE RATING	I ² T参考值 REFERENCE (A ² .S)
3D0100A/B	100mA	0.0015
3D0125A/B	125mA	0.0025
3D0160A/B	160mA	0.0042
3D0200A/B	200mA	0.0065
3D0250A/B	250mA	0.010
3D0300A/B	300mA	0.018
3D0315A/B	315mA	0.020
3D0350A/B	350mA	0.025
3D0400A/B	400mA	0.035
3D0500A/B	500mA	0.060
3D0630A/B	630mA	0.150
3D0750A/B	750mA	0.350
3D0800A/B	800mA	0.5
3D1100A/B	1A	0.6
3D1125A/B	1.25A	1.2
3D1150A/B	1.5A	1.6
3D1160A/B	1.6A	1.8
3D1200A/B	2A	2.4
3D1250A/B	2.5A	3.2
3D1300A/B	3A	6.0
3D1315A/B	3.15A	7.0
3D1350A/B	3.5A	7.5
3D1400A/B	4A	8.0
3D1500A/B	5A	15
3D1600A/B	6A	24
3D1630A/B	6.3A	28
3D1700A/B	7A	36

目录编号 CATALOG NO. A:250V B:125V

认证 APPROVALS	证书号 CERT NO.
UL: 100mA~7A 250V/125V	E221465
CUL:100mA~7A 250V/125V	E221465

分断电流:

INTERRUPTING RATING:

50 amperes at 125V AC

50 amperes at 250V AC

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING	熔断时间 BLOWING TIME
100%	4 hours Min(大于4小时)
200%	60 sec Max(小于60秒)