




ICODE SLI Label | ISO 15693 Compliant

Available in a wide range of sizes to meet every project's requirements.

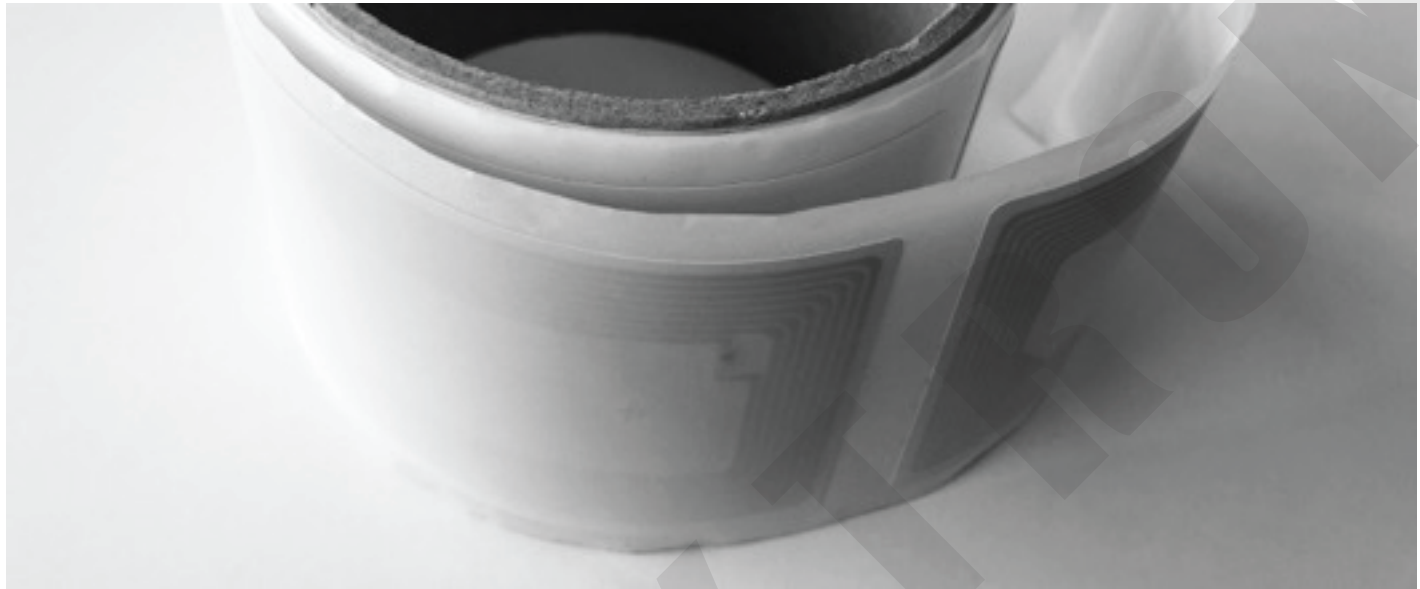

Frequency	13.56 MHz
Compliance	ISO/IEC 15693
Memory size	1024 bits
Features	True anticollision Electronic Article Surveillance (EAS) High data integrity: 16 Bit CRC, framing Application Family Identifier (AFI) supported Data Storage Format Identifier (DSFID)
Available Types	Paper Label, PVC Label, PET Label Dry Inlay, Wet Inlay Anti-tear / Tamperproof Label, Label with Cutting Lines Windshield Tag On-Metal (Anti-Metal) Label <small>Certain types may not be available in all sizes. Please contact sales@roxtron.com for more information.</small>
Temperature	-25° to 50° Celsius
Dimensions	According to customer's requirements. For custom shapes and sizes, please contact us at sales@roxtron.com .
Printing Options	Full-color offset printing, Silkscreen printing
Number Printing Options	Inkjet, Thermal Flat, Laser

The specifications are subject to change without notice. Copyright © 2005-2016 Roxtron Ltd. All rights reserved.