

RoHS



SPECIFICATIONS

Rated(额定参数): 300V,20A
Dielectric strength(抗电强度): AC2000V/1 Minute
Insulation Resistance(绝缘电阻):1000MΩ Min
Contact Resistance(接触电阻):20mΩ Max
Screw Torque(扭矩): 0.5Nm (4.4Lb.in)
Wire Range(线径):12~26AWG
Strip length(剥线长度):6~7mm
Temp. range(操作温度): -40℃~+105℃
MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)
Contact(端子): Brass, Tin plating(黄铜镀锡)
Clamp(方块): Brass/Steel(铜/铁), Ni plating(镀镍)
Screw (螺丝): M3.0, Steel, Zinc plating(钢,镀锌)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO 6	OVER 6 TO 10	OVER 10 TO 24	TO 30	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150	OVER 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

Ordering Information


JL 129 - XXX XX X X 1

Pitch
750=7.5PH
762=7.62PH




No.of pins
2P,3P,4P~12P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
O=Pe bag
T=Tube
A=Tray

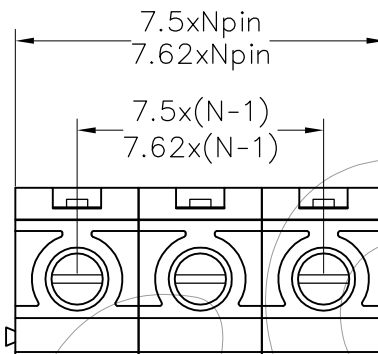

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

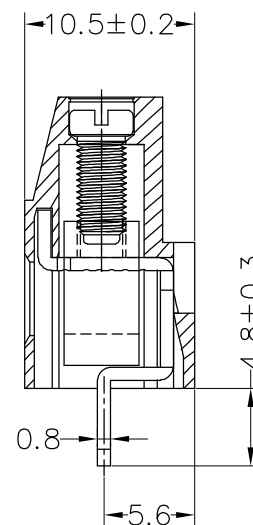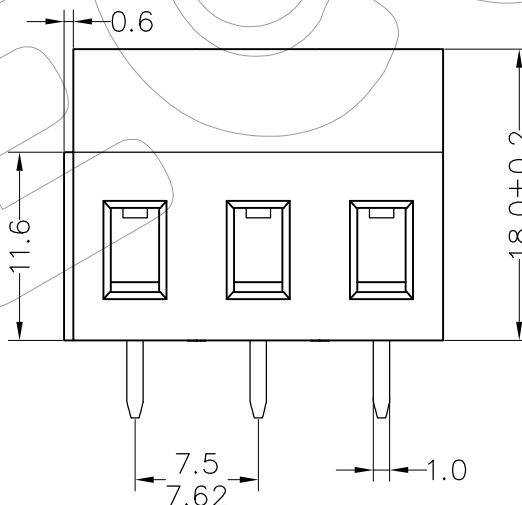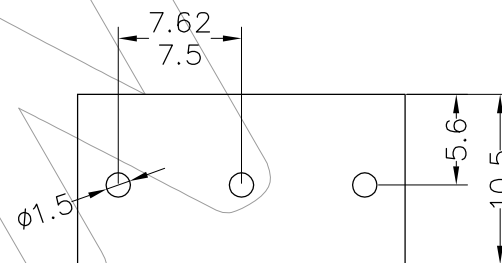

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW

Lu jin ying

19.07.04

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

JL129-XXXXXXX1

TITLE:

PCB UNIVERSAL SCREW TERMINAL
BLOCKS

A0 19.07.04 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION

CHANGE