








ABIDE BY ROHS



Circuit Diagram



P.C.B layout Pattern Side

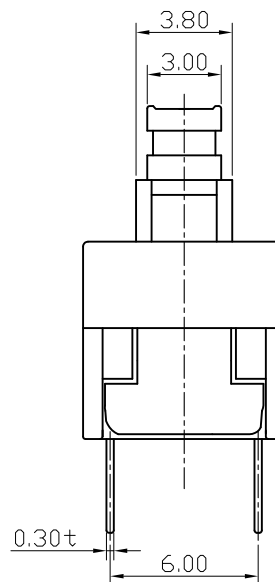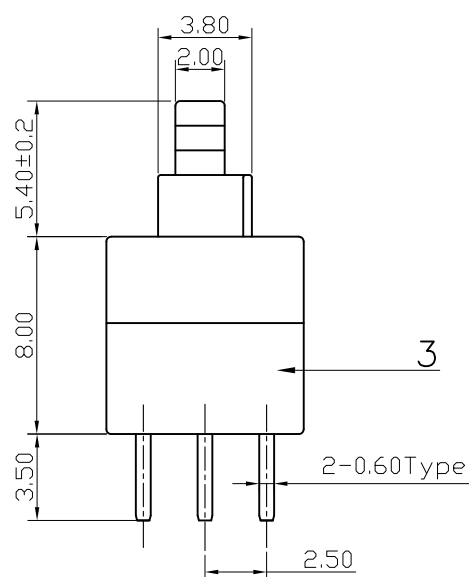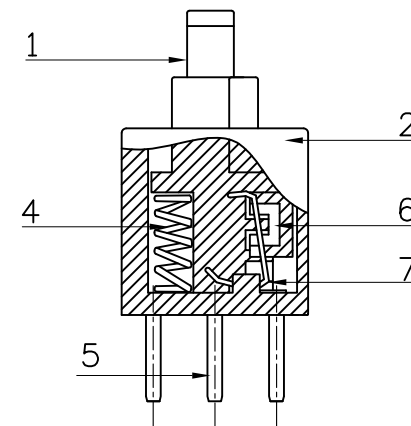

Specification :

1. Rating : DC30V 0.5A
2. Contact Resistance : 100mΩ Max
3. Insulation Resistance : 100MΩ Min
4. Withstand Voltage :
AC250V (50-60Hz) For 1 Minute
5. Operation Force : 200±50gf
6. Life Test : 100,000 Cycles
7. Total Travel : 2.4±0.20 mm
8. Work Style : Lock

7	Hookpin	—	1PCS	Carbon Steel	—	—
6	Contact	—	2PCS	Copper-Silver Composite	—	—
5	Terminal	—	2PCS	Brass /PA66	Plating Silver	—
4	Spring	—	1PCS	SWC	—	—
3	Base	—	1PCS	PBT	Black	UL 94HB
2	Cover	—	1PCS	POM	White	UL 94HB
1	Keystoke	—	1PCS	POM	Blue	UL 94HB
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		 Kailh 东莞市凯华电子有限公司 KAIHUA ELECTRONICS CO.,LTD		
DRAWN		WUYU	2019. 06. 26				
CHECKED				TITLE:		8.0自锁6PIN按键开关	
APPROVALS				PART NO.		CPG808110D01	
TOLERANCES ARE	30<L	±0.30	ANGLE	UNIT: mm	SCALE: 2:1		
	10<L≤30	±0.20					
	5<L≤10	±0.15	±2°				
	L≤5	±0.10					
DRAWING NO.				SHEET 1 OF 1			

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.