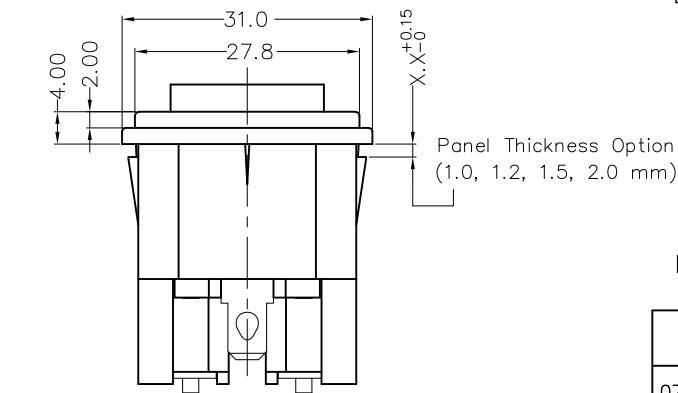
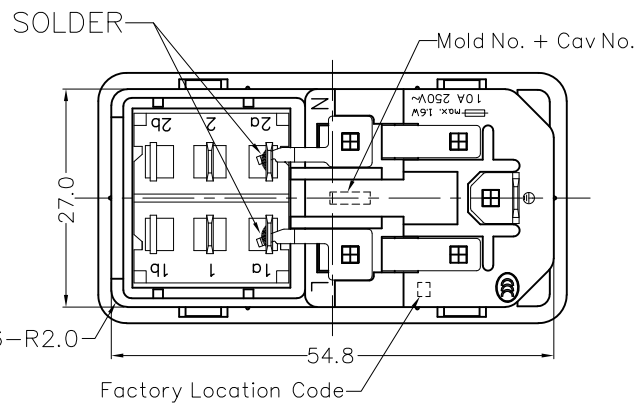
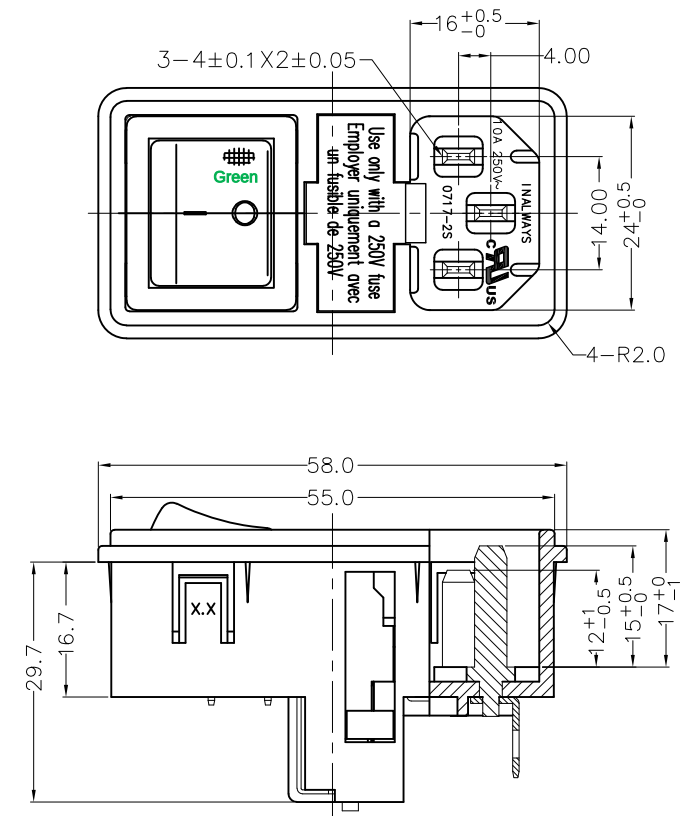


PANEL CUT-OUT

SPECIFICATION

A: MATERIAL:

1. HOUSING: PC, UL 94V-0
2. TERMINAL: COPPER ALLOY, TIN PLATED


B: CHARACTERISTICS:

1. RATING: 10A 250V~ NORTH AMERICA & EUROPE
2. INSULATION RESISTANCE: 100 MΩ MIN, AT 500 V DC
3. ELECTRIC STRENGTH: AC 2,000 V FOR 1 MINUTE

C: APPROVALS:

UL, CUL, TUV, & CCC

D: DIAGRAM:

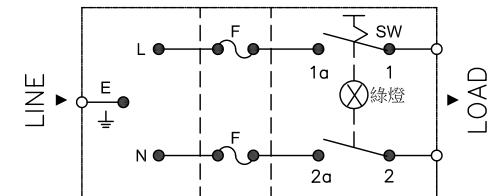

E: ORDERING INFORMATION:

P/N	PANEL THICKNESS	SOCKET'S TERMINAL	SWITCH'S TERMINAL
0717-2SPQ10-H-G-CBK	1.0 mm		
0717-2SPQ12-H-G-CBK	1.2 mm		
0717-2SPQ15-H-G-CBK	1.5 mm		
0717-2SPQ20-H-G-CBK	2.0 mm		

E			
D			
C			
B	2024.12.19	DGR24011	变更保险丝座刻字
A	2022.11.28	RELEASE	NEW REVISION
REV	DATE	DOCUMENT	DESCRIPTION

深圳易凯达科技有限公司 WIN-KARE TECHNOLOGY CO.,LTD.				PART NO.: 0717-2SPQXX-H-G-CBK		NAME: AC INLET 3P + SWITCH & 2 FUSE (SNAP-IN)	
TOLERANCE UNLESS OTHERWISE MARKED DIMENSION: .000: ±0.1 .00 : ±0.2 .0 : ±0.3				MATERIAL: SEE ABOVE		SPEC.: IEC 60320-1, C14 IEC 60127-6	
A 4				UNIT mm	SCALE 1 : 1	SHEET 1 of 1	NOTE: DOC.# S717-00XX