
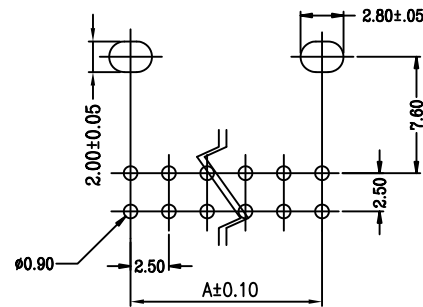


NOTE :

- * Material : Nylon UL 94V-0
- * Current rating : 3A, AC/DC
- * Voltage rating : 250V, AC/DC
- * .023" (0.60mm) right angle round pins
- * Tin plated brass pins
- * 8-26 circuits available



RECOMMENDED PCB LAYOUT

CIRCUITS	DIM. A	DIM. B	CIRCUITS	DIM. A	DIM. B
8	7.50	15.00	16	17.50	25.00
10	10.00	17.50	18	20.00	27.50
12	12.50	20.00	20	22.50	30.00
14	15.00	22.50	26	30.00	37.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

P PROJECTION



ORDER INFORMATION

XAD-RP-xx-LF
SERIES | LEADFREE
| 08-26WAY
| MALE
| DIP 90°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: