

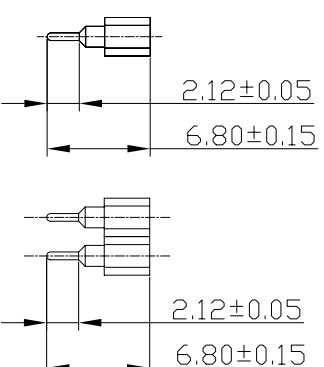
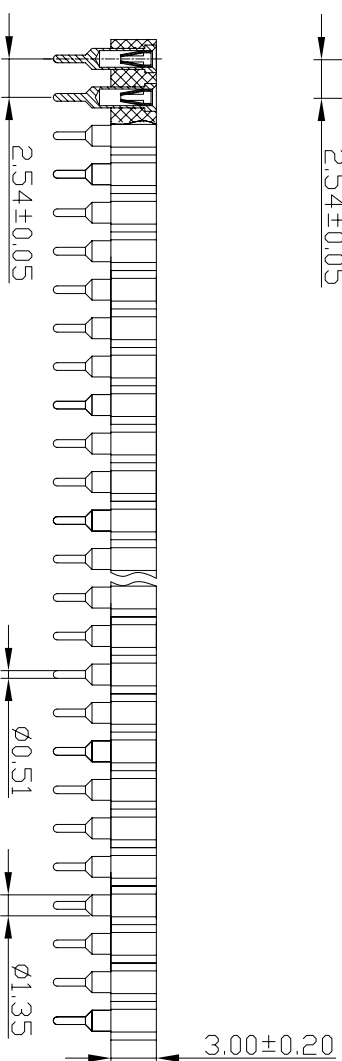
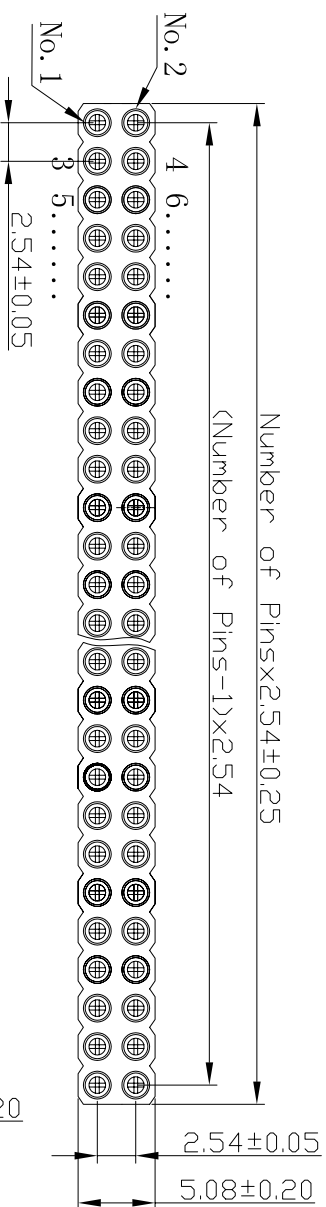


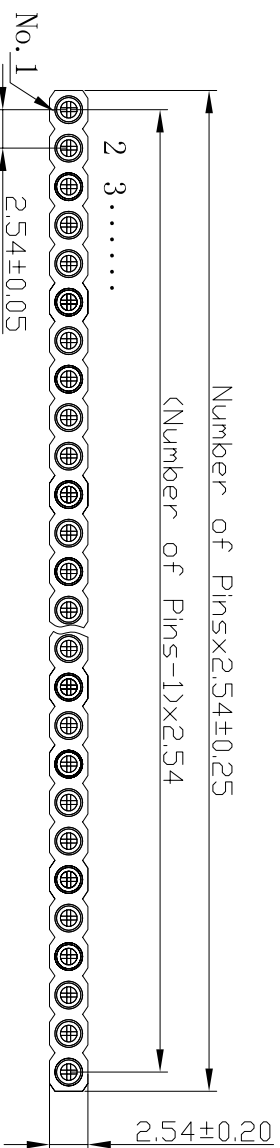

Technical Specs:

Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass
Contact clip(4/6 finger):	Beryllium copper(C17200)
Accepted pin:	Ø0.40 to 0.56mm
Forces:	(polished steel gauge Ø0.43mm)
--Insertion	2 N typ
--Withdrawal	1 N typ
Mechanical life:	min500 cycles
Rated current:	3A
Contact resistance:	max 10mΩ
Dielectric resistance:	Min 1000V RMS
Coplanarity SMD	max 0.1 mm(measured on
terminations:	25 mm long connectors)

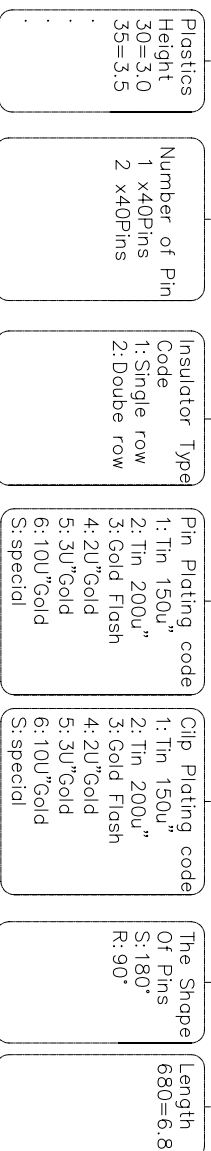

UNLESS OTHERWISE SPECIFIED TOLERANCE X : ± 0.3 X° : $\pm 5^\circ$ X.X : ± 0.2 X.X° : $\pm 1^\circ$ X.XX : ± 0.1 X.XX° : $\pm 0.5^\circ$		DRAWN NAME: 2.54x3.0圆孔IC座/L=6.80	
CRAW:	BEN	CHECKED:	APPROVED:
DATE:	05/02/12	DATE:	/ /
		SIZE: A4	SCALE: N: 1
		REV: A	UNIT: mm
		PROJECT	Drawing No.
			
		PAGE	1/1
		DATE:	/ /