

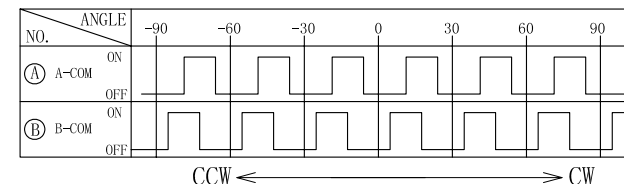


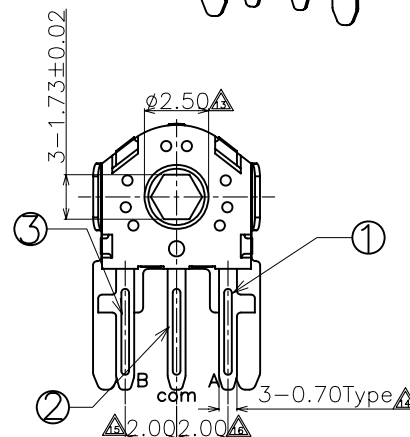


5 4 3 2 1

遵守欧盟WEEE和ROHS之规定

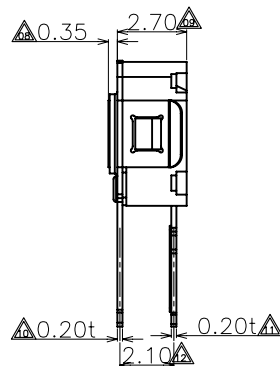

Numbers of detent: 12
Pulse/Rotation: 12 Pulse/360° (reverse)

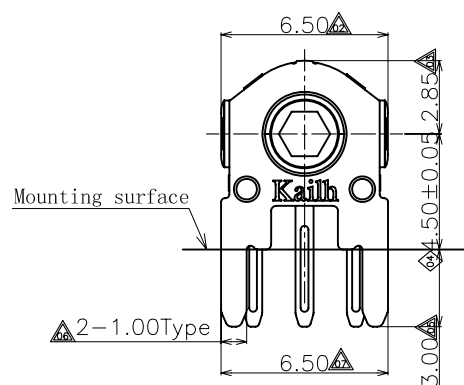


产品规格



- 1. 额定电压: D.C. 5V
- 2. 最大额定电流 (阻抗负载)
各导线 : 1mA
- 3. 分析能力: 每12个脉冲/360°
- 4. 接触电阻: 10Ω (最大)
- 5. 绝缘阻抗: 50MΩ (最小) DC50V
- 6. 耐电压: AC50V (50-60Hz) 持续1分钟
- 7. 卡点扭力矩: 10-25gf.cm
- 8. 寿命测试 : 100,000 次(最小)

Shaft hole shape and dimension

Shaft hole position
will be at random



(Tolerance: ±0.1)
(P.C.B thickness t=1.6mm)

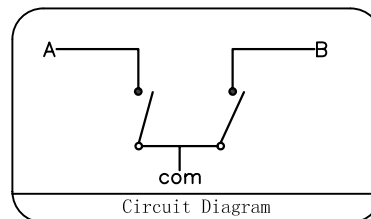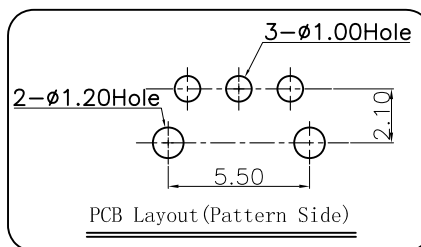

备注: 底座背面的压针孔★是根据产品模具成型要求而定的, 其规格的大小与数量的多少对产品结构、功能及使用无任何影响。

8	弹片	—	1	不锈钢(SUS301-3/4H)	—	—
7	止动轮	—	1	POM(F20-03)	Black	UL 94HB
6	簧片	—	1	磷铜(C5210R-EH)	—	—
5	底座	—	1	PA66+G/F30%	黑色	UL 94V-0
4	外壳	—	—	不锈钢(SUS304-1/2H)	镀亮锡100-120u"	—
3	端子	3	1	H65Y (0.2t)	镀银	—
2	端子	2	1	H65Y (0.2t)	镀银	—
1	端子	1	1	H65Y (0.2t)	镀银	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE		东莞市凯华电子有限公司 DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD		
DRAWN		Wanwenxue		Aug.06.2009		
CHECKED				TITLE: EN6545-1 Encoder (H=4.50mm/DIP)		
APPROVALS				PART NO. EN654512R01		
TOLERANCES ARE		30<L	±0.30	ANGLE UNIT: mm SCALE: 1:1 DRAWING NO.	PROJECT:	
		10<L	±0.20			
		5<L	±0.15			
		L	±0.10			SHEET 1 OF 1

—	A0	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.