




威固电子户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

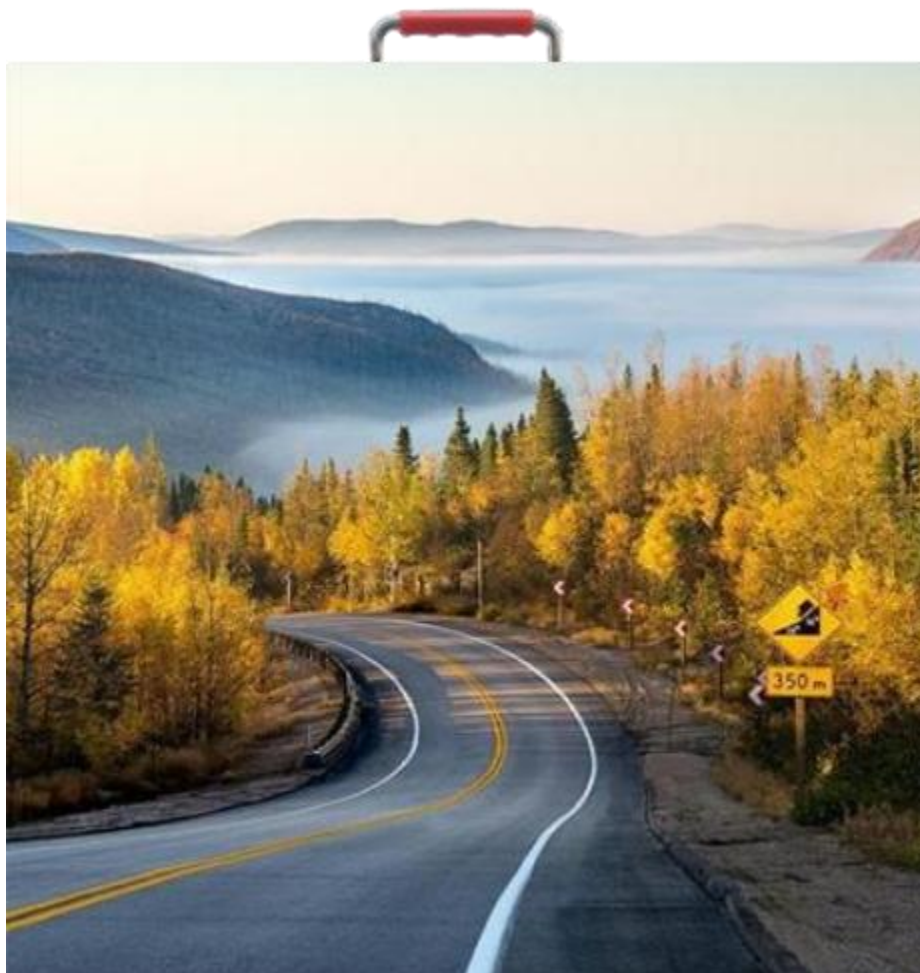

户内常规小板 P4-256 表贴三合一

INDOOR CONVENTIONAL PANEL P4-256 SMD 31N1 PRODUCT SPECIFICATION

产品规格书

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION



技术参数

TECHNICAL PARAMETERS

模组 Unit Module	项目	Item	参数	Parameter
	产品型号	Model Number	VG-P4-16s	
	模组尺寸	Module Size	256mm*128mm	
	物理点间距	Physical Pitch	4mm	
	物理密度	Physical Density	62500dots/m2	
	发光点颜色	Pixel Configuration	1R1G1B	
	LED 封装	Package Mode	SMD 3IN1 -2121	
	模组分辨率	Module Resolution	64dots(W)*32dots(H)	
	模组最大功耗	Max Power Consumption	16W	
	模组厚度	Module Thickness	14mm	
	模组重量	Module Weight	170g	
	驱动方式	Drive Type	恒流驱动 Constant drive	
	扫描方式	Scan Mode	1/16 扫描 1/16scan	
	接口方式	Port Type	HUB75	
	匹配箱体尺寸	Match Cabinet Size	W512mm*H512mm	

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

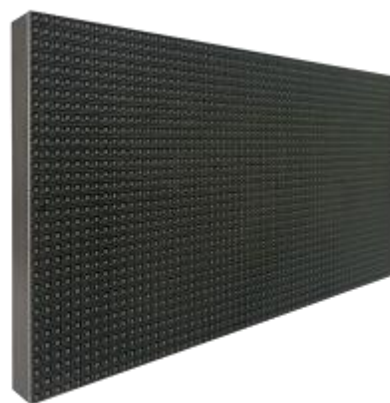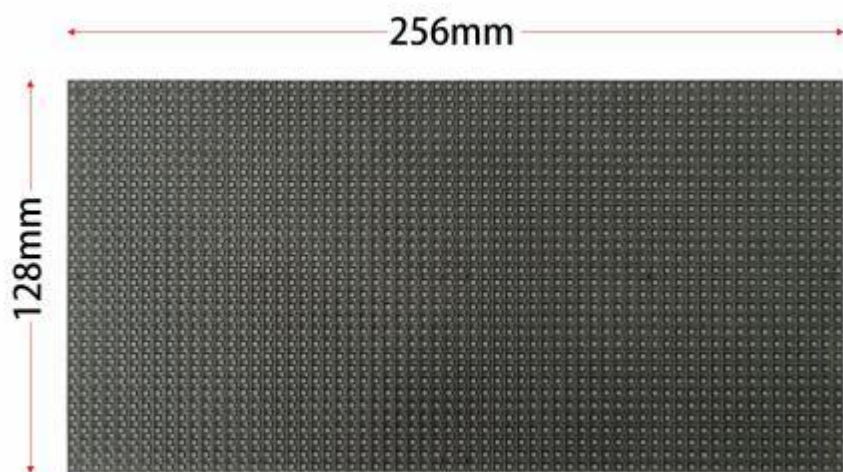

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

显示屏参数 Display Parameters	最佳视角 Best Viewing Angle	H:120° ;V:120°
	视距 Recommended Viewing Distance	4m-28m
	驱动 ic Driver IC	北方集创 ICND2038s
	画面刷新率 Refresh Rate	1200Hz
	白平衡亮度 Brightness of White Balance	700cd/m²
	输入电压 Input Voltage	110-220V;AC±10%
	工作温度/湿度 Operating Temperature/ Humidity	-30℃ ~+45℃
	平均功耗 Average Power Consumption	165w/m²
	最大功耗 Max. Power Consumption	600w/m²
	寿命 Life Time	>100000 hours
	坏灯率 Bad Light Rate	<0.0001
	平均无故障时间 MTBF	>5000 hours

户内全彩系列产品规格书

INDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

案例分享

CASE SHARING

