
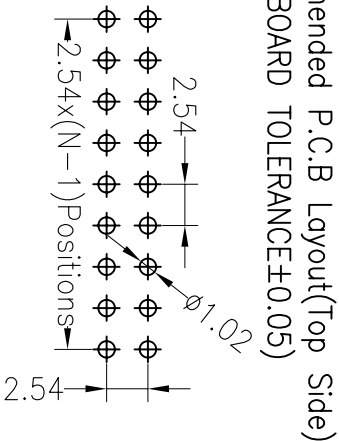


1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c



Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

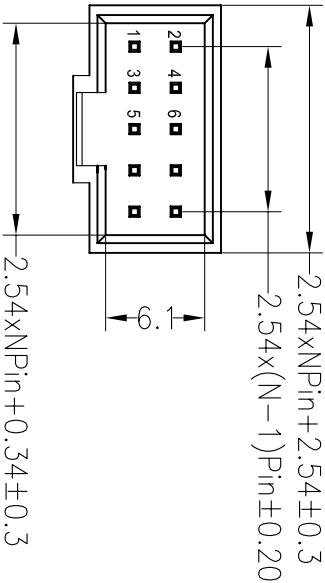

Ordering Information

3211- XX XX X S BK 01

No.of Pins Per Row 6--64
 Contact Plating G0:Gold Flash
 Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
 SN:Tin
 S0:Gold Flash/Tin

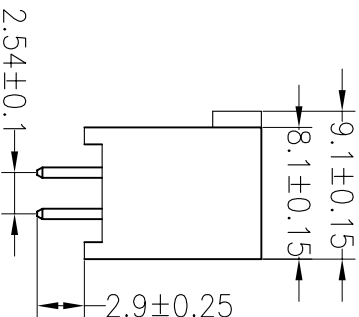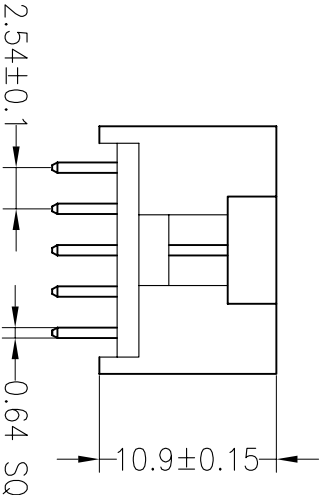

A								
A	A0	2012.03.28	NEW DRAWING					
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	
	1							
	2							
B								
C								
D								
E								
F								
G								

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO. 3211-XXXXXSBK01
 TITLE: 2.54mm Box Header H10.9mm 180°