

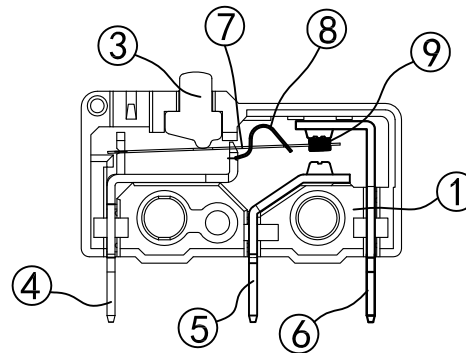


ABIDE BY WEEE & ROHS





■ Reliable Rating:

- 1. Rated Voltage/Current: DC12V 0.1A
- 2. Contact Resistance: $\leq 100\text{m}\Omega$
- 3. Insulation Resistance: $\geq 100\text{M}\Omega$ DC500V
- 4. Withstand Voltage: AC1000V 1 minute
- 5. Operating Force: $110 \pm 30\text{gf}$
- 6. Position Travel: $0.6 \pm 0.2\text{mm}$
- 7. Mechanical Life :1,000,000 cycles



SCHEMATIC

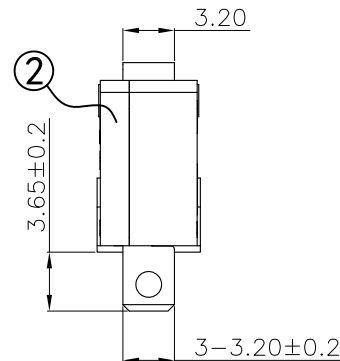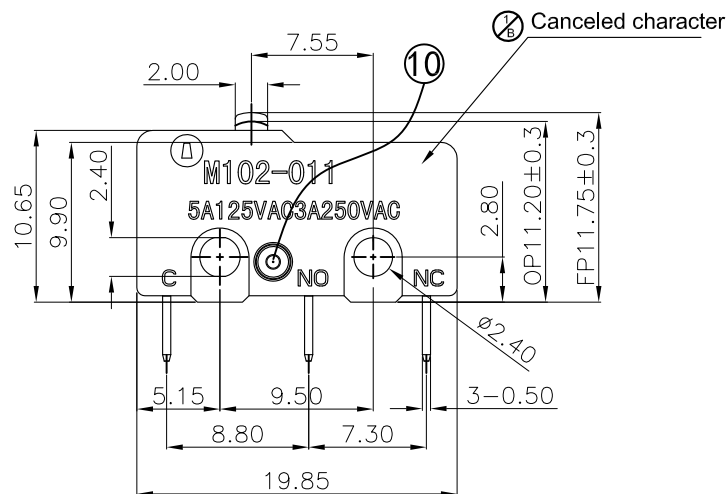

⑩	Rivet	—	1	Aluminous	Natural	
⑨	Contact	—	1	Copper	Ag-Plated	
⑧	Reed	—	1	Beryllium bronze	Natural	
⑦	Movable Plate	—	1	Beryllium bronze	Natural	
⑥	NC Terminal	NC	1	Brass	Ag-Plated	
⑤	NO Terminal	NO	1	Brass	Ag-Plated	
④	COM Terminal	COM	1	Brass	Ag-Plated	
③	Keystoke	—	1	PBT	Black	
②	Cover	—	1	PBT	Black	
①	Base	—	1	PBT	Black	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	 KAIHUA ELECTRONICS CO.,LTD			
DRAWN	Xu Qi Feng	2013.06.11				
CHECKED			TITLE:		MI1910 MICRO SWITCH	
APPROVALS			PART NO.		MI191003W01	
TOLERANCES ARE		30<L ±0.30 10<L≤30 ±0.20 5<L≤10 ±0.15 L≤5 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		±2'	DRAWING NO.	KHA-MI1910-005EN		SHEET 1 OF 1

	B	2017.08.21	Canceled character with note "ⓑ"	L. Zhang		
	A	2013.06.11	NEW	Xu Qi Feng		
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.