

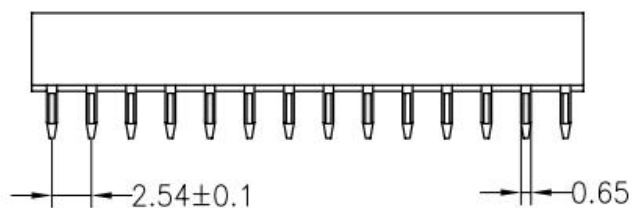



SPECIFICATIONS:

Rated Current	3.0 AMPS
Contact Resistance	20mΩ Max
Withstand Voltage	1000V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C

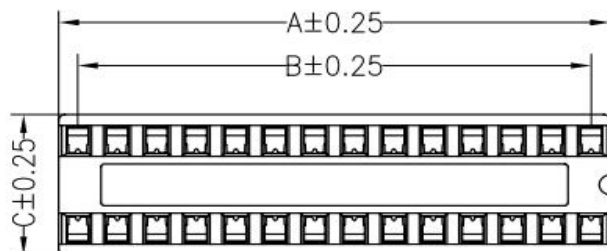

Contact Material	Phosphor Bronze
Contact Plating	Au or SN Over NI
Insulator Material	PBT (UL94V-0)
Soldering Temperature	180°C for 30-60 seconds 200°C for 10 seconds

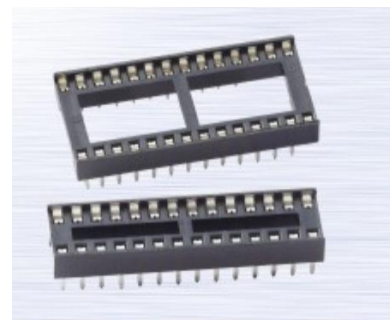

Pin No.	A	B	C
06P	7.52	5.08	9.96
08P	10.06	7.62	9.96
14P	17.68	15.24	9.96
16P	20.22	17.78	9.96
18P	22.76	20.32	9.96
20P	25.30	22.86	9.96
24P	30.38	27.94	9.96
28P	35.46	33.02	9.96
32P	40.50	38.10	9.96
40P	50.70	48.26	9.96

Ordering Information

HC Series	Insulator Width	No.of Pin Per Row	Type	Plating Code	Insulator Option	PIN Length	Packing Code	End code
HC-ICF411 2.54mm IC Socket	N=7.62	06P	S=Straight	SN=Tin Plated	A=PBT	762mm	0=PE Bag	01
		40P		SM=Matted Tin	G=PPS		T=Tube	