



Category

SWITCH

SOCKET

BREAKER

FUSE HOLDER

FUSE

ENCODER

INDICATOR

POTENTIOMETER

CONNECTOR

WATERPROOF CONNECTOR

WATERPROOF PARTS

PCBA

NEW PRODUCT

Products Search



OUR PRODUCT

[Home](#) ▶ [Our Product](#) ▶ [KS](#) ▶

SOCKET / INLET

KS
IEC 60320 C14 Receptacle, 15A 250VAC, Mounted by Screw or
Snapin, Solder or Quick Connect Terminals

IEC 60320 AC power inlet.
C14 receptacle, 15A 250VAC.
Screw, Snap-in or PCB mounting.
Solder lug or quick connect terminals.
Metal housing available for grounding.

 ZOOM IN


PDF Download

Get Information

 [Print this page](#)

Feature


- 15A 250VAC (UL, CUL)
- 10A 250VAC (VDE, ENEC, CCC)
- Meet all UL498 & EN60320 requirements
- Insulation resistance : 100M Ω (min.), DC 500V
- Dielectric Strength : 2000Vac for 1 minute
- Housing: PBT, PA66 or PC, UL rated 94V-2 min
- Temperature range : -20 to +85 degrees in Celsius.
- Terminals: Tin-plated brass








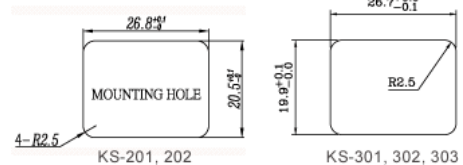


Specification




KS-101
solder lug

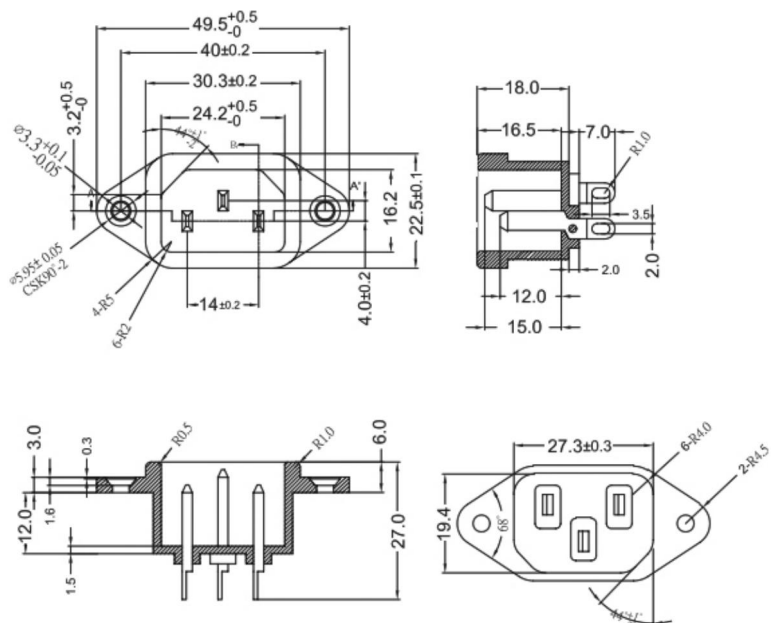

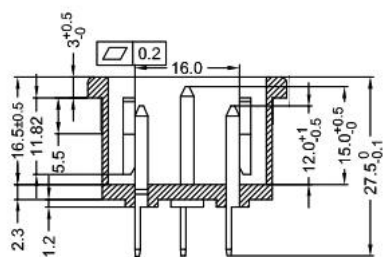





KS-301

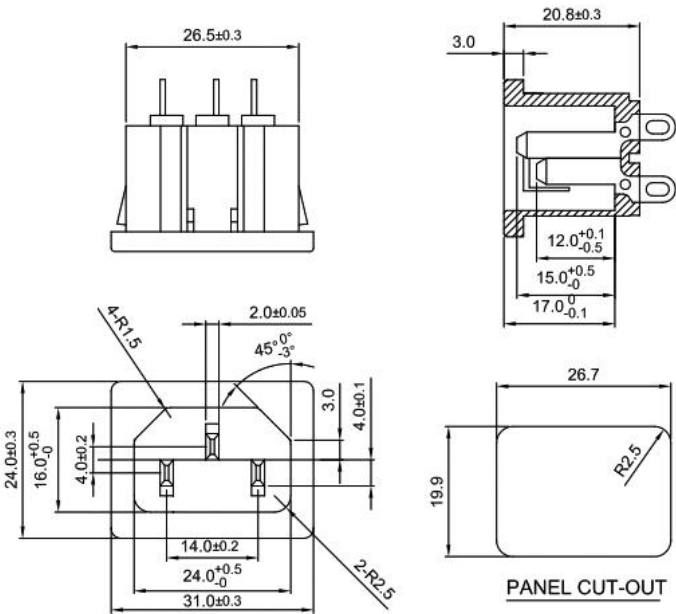

KS-302
.187 terminals

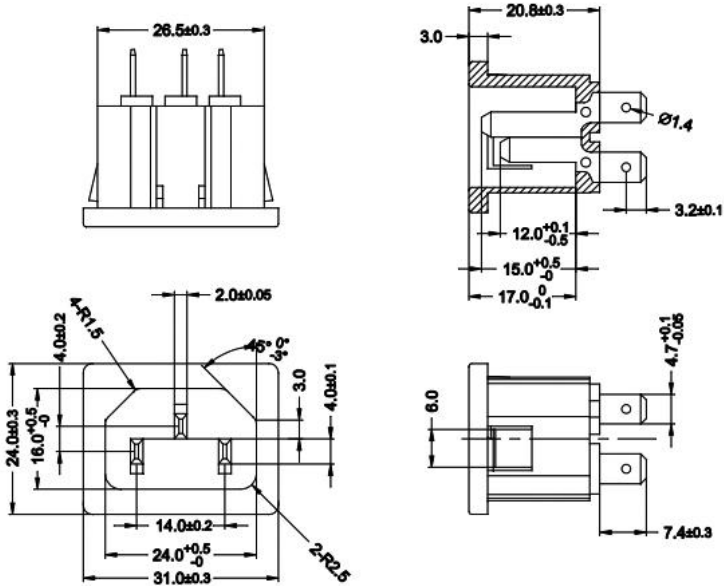


KS-303

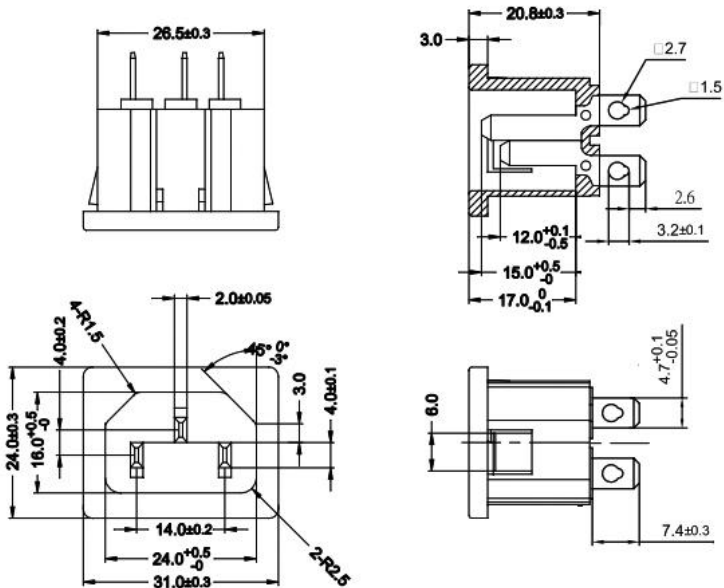





KS-406

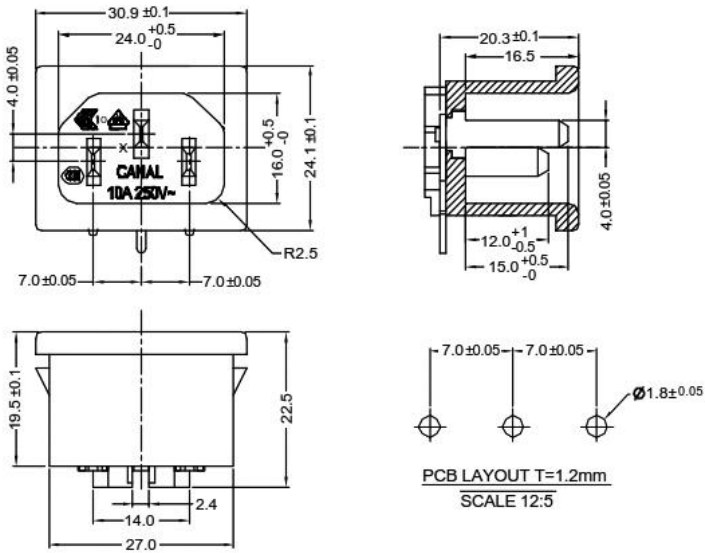

KS-506
PCB pins

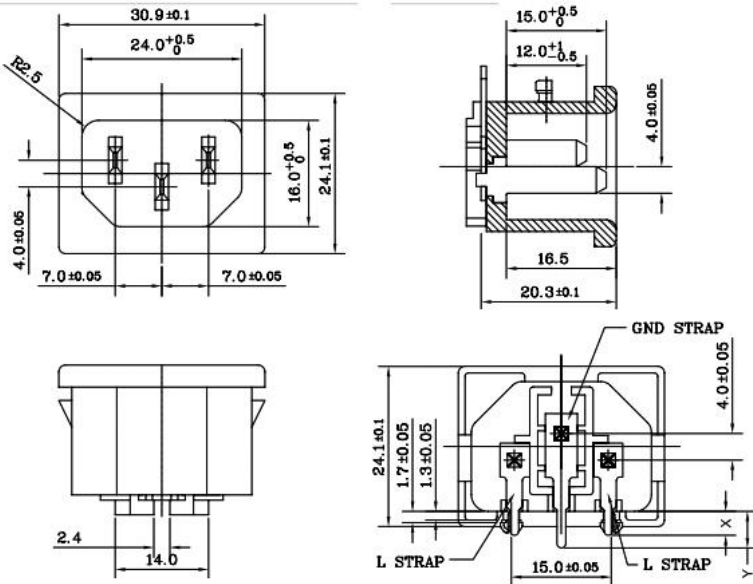

KS-606-E
additional switch

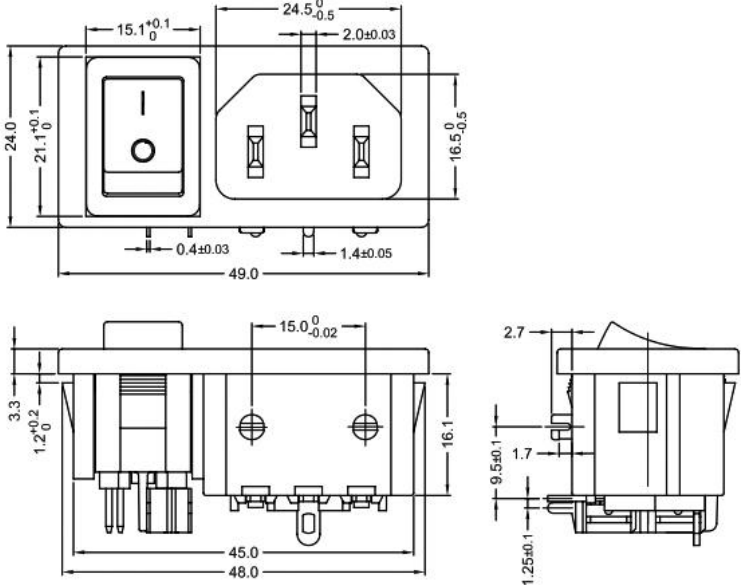




C-236



KS-101FH

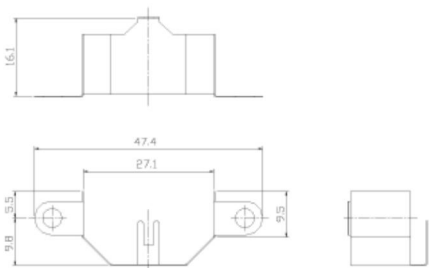

◀ BACK



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.
Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserve