




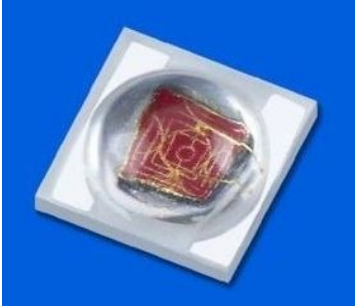
BOSMFC OPTOELECTRONICS CO. LTD

Address: DiChong 3th Industrial Zone GaoBu Town, DongGuan, GuanDong
Tel: (+86)-0769-22631491 Fax: (+86)-0769-89616935 Mobile: (+86)-18925731750

Model:	1206 SMD LED	Model:	0603 SMD LED	Model:	0805 SMD LED
Emitting color:	Red/yellow/blue/green/white	Emitting color:	Red/yellow/blue/green/orange/white	Emitting color:	Red/yellow/blue/green/white
Size:	3.2×1.5×1.1mm	Size:	1.6×0.8×0.73mm	Size:	2.0×1.25×1.10mm
Wavelength:	620×630nm	Wavelength:	620×630nm	Wavelength:	620×630nm
Chip:	Epistar/Sanan	Chip:	Epistar/Sanan	Chip:	Epistar/Sanan
Brightness:	120-220mcd	Brightness:	140-230mcd	Brightness:	140-230mcd
Application:	Car, LCD TV backlight, industrial control equipment, back light, electronic scale, instruments and meters, bluetooth, mobile power supply, digital products, intelligent product etc.	Application:	Navigation, auto meter gauge plate, industrial control equipment, traffic lights, bluetooth, mobile power supply, digital products etc.	Application:	General signs, advertising media, automotive electronics, LED display, bluetooth, mobile power supply, digital products, smart products etc.
Certificate:	ROHS comply, technical support available	Certificate:	ROHS comply, technical support available	Certificate:	ROHS comply, technical support available

Model:	3528 SMD LED	Model:	5730 SMD LED	Model:	3014 SMD LED
Emitting color:	Red/yellow/blue/green/orange/white	Emitting color:	white	Emitting color:	Red/yellow/blue/green/white
Size:	3.5×1.4×3.7mm	Size:	5.6×3.0×0.9mm	Size:	3.0×1.4×0.8mm
Wavelength:	620×630nm	Color temp:	5500-7500K	Wavelength:	620-625nm
Chip:	Epistar/Sanan	Chip:	Epistar/Sanan	Chip:	Epistar/Sanan
Brightness:	400-800mcd	Brightness:	35-55LM	Brightness:	600-800mcd
Application:	Industrial control equipment, traffic lights, mobile phone, lighting, electronic scale, advertising and other modules, with lamp switch etc.	Application:	Car electronics, LCD backlight, industrial control equipment, video camera, LED flashlight, panel lights, lights, digital products, intelligent product etc.	Application:	Signs, displays, industrial control equipment, traffic signal lamp, LEC backlit, automotive lighting, electronic display, panel lights etc.
Certificate:	ROHS comply, technical support available	Certificate:	ROHS comply, technical support available	Certificate:	ROHS comply, technical support available

Model:	5050 SMD LED	Model:	2835 SMD LED	Model:	5630 SMD LED
Emitting color:	white	Emitting color:	white	Emitting color:	Red/yellow/blue/green/white
Size:	5.0×1.6×5.3mm	Size:	3.5×0.75×2.8mm	Size:	5.7×3.0×0.9mm
Color temp:	4000-6500K	Color temp:	6000-7500K	Wavelength:	617-633nm
Chip:	Epistar/Sanan	Chip:	Epistar/Sanan	Chip:	Epistar/Sanan
Brightness:	16-18-20LM	Brightness:	20-24LM0.2W / 50-60LM0.5W	Power dissipation:	0.2/0.5w
Application:	Automotive electronics, lighting products, intelligent lighting, monitoring equipment, desk lamp, identification, panel lights, lamp etc.	Application:	Billboards, electronic display screen, industrial control equipment, traffic lights, signs, car tail lights, LED modules, LED flashlight etc.	Application:	Intelligent lighting, automotive electronics, LCD backlight, industrial control equipment, video camera, LED flashlight, panel lights, lights, digital products, smart products etc.
Certificate:	ROHS comply, technical support available	Certificate:	ROHS comply, technical support available / LM-80	Certificate:	ROHS comply, technical support available

					
Model:	7020 SMD LED	Model:	4014 SMD LED	Model:	010 SMD LED
Emitting color:	White	Emitting color:	White	Emitting color:	White
Size:	7.0×2.0×0.8mm	Size:	4.0×1.4×0.65mm	Size:	3.8×1.04×0.4mm
Color temp:	6000-7500K	Color temp:	6000-7500K	Color temp:	6000-7500K
Chip:	Epistar/Sanan	Chip:	Epistar/Sanan	Chip:	Epistar/Sanan
Brightness:	55-65LM	Brightness:	18-24LM 50-60LM	Brightness:	1100-1500mcd
Application:	Back light LED lighting products, LCD TV backlight, panel lights, lamp light source, display screen etc.	Application:	Auto lamp, fluorescent lamp, ball bubble lights, panel lights, lights etc.	Application:	Back light, neon lights, ball bubble lamp, fluorescent lamp, display, MP3 / MP4 / mobile phone/digital products, such as backlight etc.
Certificate:	ROHS comply, technical support available	Certificate:	ROHS comply, technical support available / LM-80	Certificate:	ROHS comply, technical support available
					
Model:	3535 High power White LED	Model:	3535 High power LED	Model:	3535 High power UV LED
Emitting color:	White	Emitting color:	Red / Blue /Green	Emitting color:	UV led
Size:	3.45*3.45*1.95mm	Size:	3.45*3.45*1.9mm	Size:	3.45*3.45*1.9mm
Color temp:	3000K/4000K/6000K/7500K	Color temp:	620-640nm/ 450-460nm/490-495	Color temp:	385-395nm /740-475nm
Chip:	Epistar/Sanan	Chip:	Epistar/Sanan	Chip:	Epistar/Sanan
Brightness:	100-160LM / 1-3W RA>70	Brightness:	18-24LM 50-60LM	Brightness:	
Application:	1, flip eutectic wireless package, high reliability; 2, excellent optical design, the system can reduce the loss of light; 3, applicable to the lamp, candle lamp, street lamps and other products. 4, power: 1-3W	Application:	Plant growth lamp	Application:	Medical equipment
Certificate:	ROHS comply, technical support available	Certificate:	ROHS comply, technical support available	Certificate:	ROHS comply, technical support available