


M8 male straight to female right angle molded cable, unshielded/M8公头直头对母头弯头成型式连接线, 不带屏蔽

Scale drawing/尺寸图




Product photo/产品图



Part number/产品料号

Pins/针数	Code/型	Part number("X" is length millimetre mm)/产品料号("X"表示长度, 单位毫米mm)		
		PVC jacket/PVC外被		PUR jacket/PUR外被
		-10°C~+80°C	-40°C~+105°C	-40°C~+105°C
3pins/3孔	A code/A型	8L00037-X	8L00164-X	8L00165-X
4pins/4孔	A code/A型	8L00221-X	8L00222-X	8L00223-X
6pins/6孔	A code/A型	8L00337-X	8L00338-X	8L00339-X
8pins/8孔	A code/A型	8L00397-X	8L00398-X	8L00399-X
5pins/5孔	B code/B型	8L00278-X	8L00279-X	8L00280-X
4pins/4针	D code/D型	8L00556-X	8L00557-X	8L00558-X

Pin assignment front view/孔位分布前视图

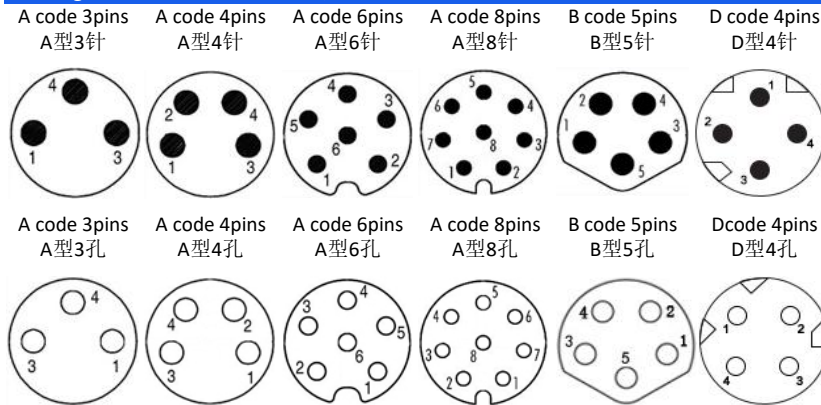

General data/常规数据

Pin numbers/孔数	3pins/3孔	4pins/4孔	5pins/5孔	6pins/6孔	8pins/8孔
Rated voltage/额定电压	60V	30V	30V	30V	30V
Rated current(40°C)/额定电流	3A	3A	3A	1A	1A
Standards/标准	IEC 61076-2-104				
Connector locking system/锁紧方式	Screw/螺锁				
Degree of protection/防护等级	IP67, IP68, IP69K				
Ambient temperature(operation)/操作温度	-25°C~+85°C				
Contact resistance/接触电阻	≤5mΩ				
Insulation resistance/绝缘电阻	≥100MΩ				
Connector body/胶芯	TPU				
Male pin/公端子	Brass with gold plated/黄铜镀金				
Screw/螺丝	Brass with nickel plated/黄铜镀镍				
Over-mold/成型	TPU				
Customs tariff number/海关编码	8518900001				
Environmental compliance/环境符合标准	RoHS, Reach				