


APPROVED BY:

可视区距玻璃边小于1.5MM, 黑色框胶有可能外露

Ver	Date	Modify Contents
V02	2016-8-3	修改图案
V03	2016-8-4	修改图案位置
V04	2016-9-5	修改背光
V05	2017-6-7	去掉背光

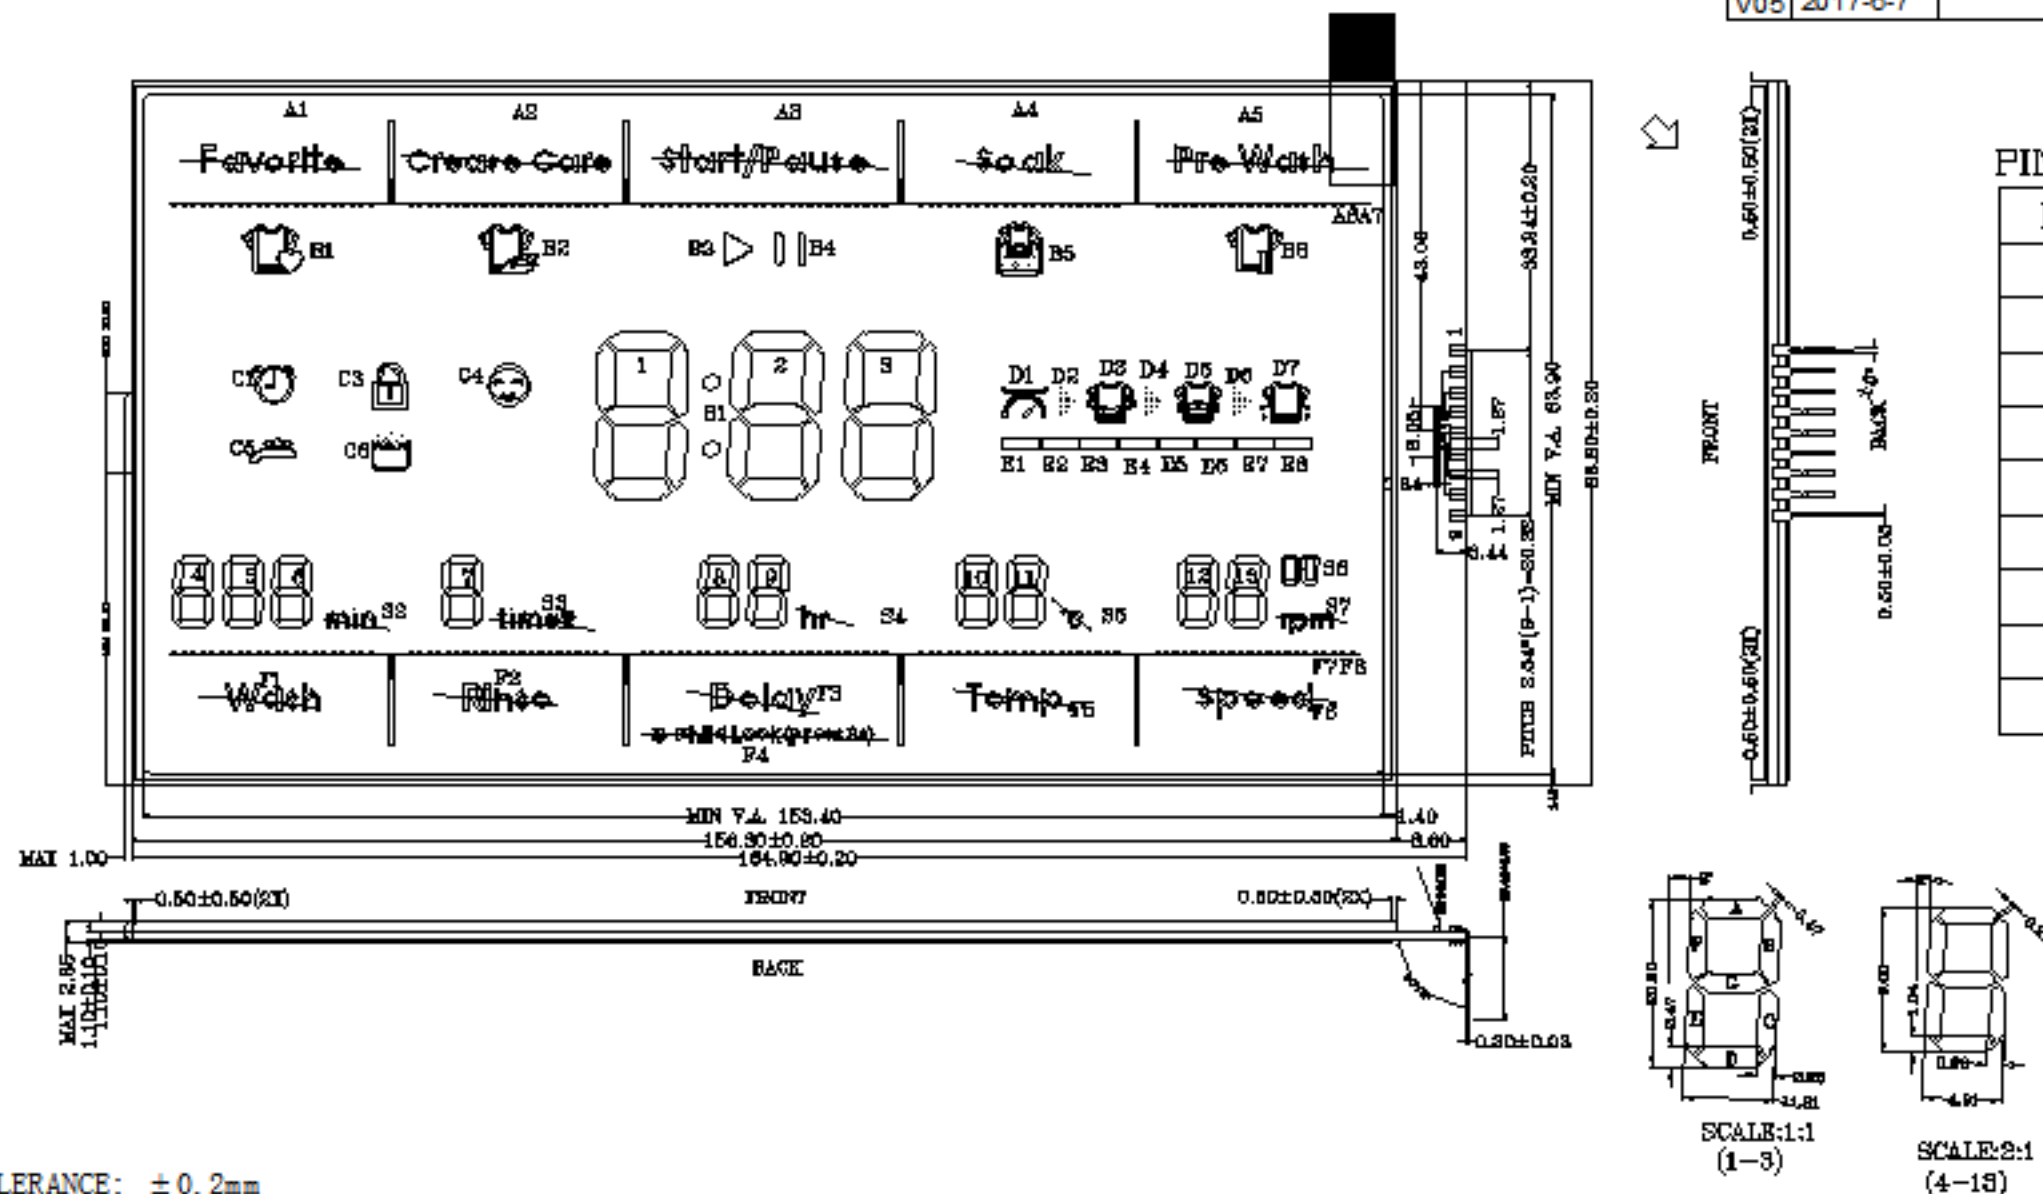

PIN ASSIGNMENT

PIN	SYMBOL
1	ESD_GND
2	SDA
3	SCL
4	RST
5	VLCD
6	VDD
7	GND
8	BLANK_IN
9	ESD_GND

NOTE:

1. GENERAL TOLERANCE: $\pm 0.2\text{mm}$

2. THE PART OF *ARE THE KEY DIMENSION TO CONTROL

LCD TYPE	HTN	BACKLIGHT COLOR	-----
POLARIZER TYPE	TRANSMISSIVE	FRAME TYPE	-----
DISPLAY TYPE	POSITIVE	DATA TRANSFER	IIC
LCD COLOR	-----	CONNECTOR TYPE	PIN
VIEWING ANGLE	12:00	TECHNOLOGY	COG
OPERATING TEMP	-20°C ~ +70°C	DC-DC IC	-----
STORAGE TEMP	-30°C ~ +80°C	LCD DUTY	1/1
BACKLIGHT TYPE	-----	LCD BIAS	1/1
CONTROLLER IC	IST3042CA1-B		ROHS
REMARKS	Vop=5V(typ.)	VDD=5V	

发至: ☐ COG质量 ☐ COB质量 ☐ 测架 ☐ FAE ☐ 开发 ☐ LCD贴片



????????????????

Anhui Golden Vision Optoelectronic Co.,L

PRODUCT NO.	GVH1002GPVL011-22862A(LCM)				
CUSTOMER NO.					
DRAWN BY	CQ	2017-6-7	SCALE	1:1	REV. V05
CHECKED BY			PAGE	4th	
APPROVED BY	Frank 2017-6-7		UNIT	mm	