

POWER FERRITE TRANSFORMERS

PQ2016 PQ2020 PQ2620 PQ2625 PQ3220
PQ3225 PQ3230 PQ3535 PQ4040 PQ5050

Introduction:

- 1.The series products contains:
- 2.The figure shown for reference only; Better at providing ODM/OEM to customers.
Make the technical parameters more size up the user's product design requirements.


FEATURES

Possessing of high permeability
High saturation flux density
Low loss, at 100°C the power loss goes bottom



COMMON APPLICATIONS

Drive transformers
Main transformers
Smoothing chokes
General purpose use


Electronical Schematic

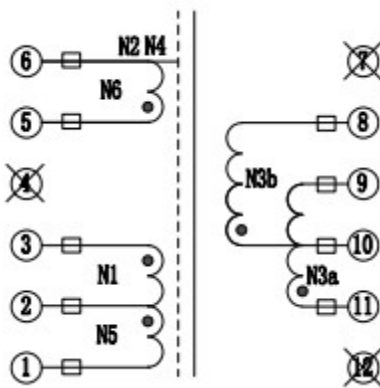

PHYSICAL CHARACTERISTICS



Structural Drawing

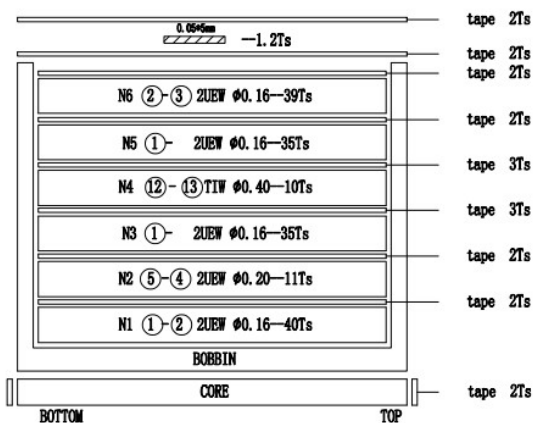

General Properties

Operating
Temperature:-40°C to +105°C.
Including temp rise
Storage Temperature:-25°C to +85°C.
Insulation Class:B.