
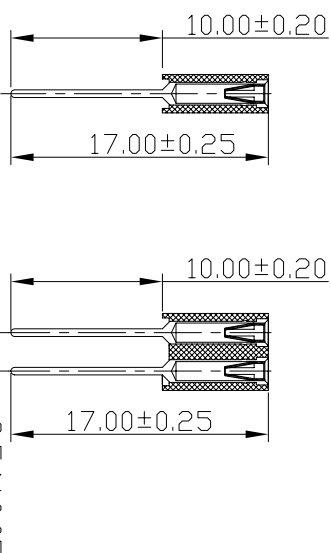
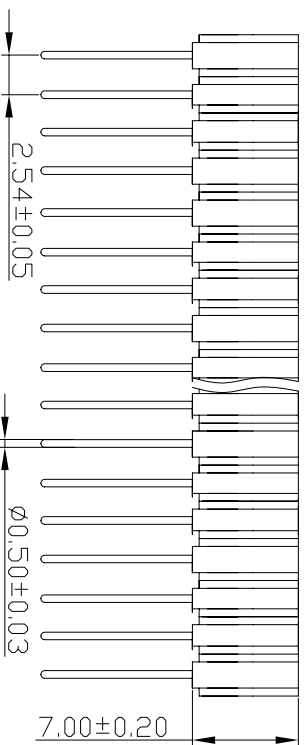
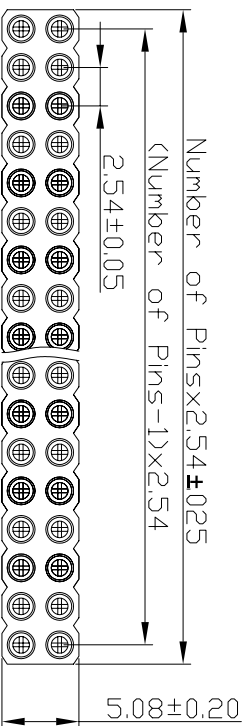


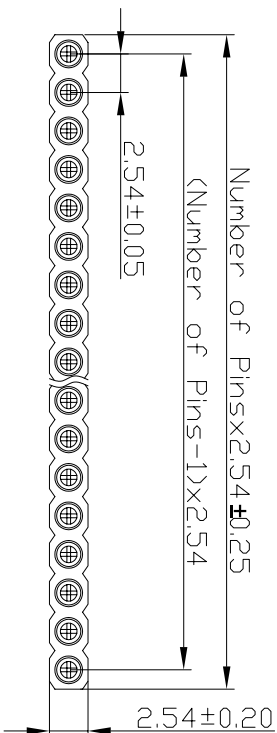

Technical Specs:

- Insulator: Black glass filled polyester PPS-GF30-FR
- Flammability: UL 94V-O
- Sleeve: Brass
- Contact clip(6 finger): Beryllium copper(C17200)
- Accepted pin: Ø0.70 to 0.90mm,0.635mm (polished steel gauge Ø0.76mm)
- Forces: 2 N typ
- Insertion 1 N typ
- Withdrawal min500 cycles
- Mechanical life: 3A
- Rated current: max 10mΩ
- Contact resistance: min 1000V RMS
- Dielectric resistance: max 0.1mm(measured on terminations: 25mm long connectors)

3620-70 XX X 2 3 S 170 01

Plastics Height 30=3.0 35=3.5 70=7.0	Number of Pin 1: x40Pins 2: x40Pins	Insulator Type Code 1: Single row 2: Double row	Pin Plating code 1: Tin 150u" 2: Tin 200u" 3: Gold Flash 4: 2U"Gold 5: 3U"Gold 6: 10U"Gold S: special	Clip Plating code 1: Tin 150u" 2: Tin 200u" 3: Gold Flash 4: 2U"Gold 5: 3U"Gold 6: 10U"Gold S: special	The Shape Of Pins S: 180° R: 90°	Pin Length 170=17.0
--------------------------------------	-------------------------------------	---	---	--	----------------------------------	---------------------

JINLING 		深圳市锦凌电子有限公司	
SHENZHEN JINLING ELECTRONICS CO.,LTD		Tel: 86-755-2997-5818 Fax: 86-755-2997-5588	
UNLESS OTHERWISE SPECIFIED TOLERANCE		DRAWING NAME: 2.54x7.0圆孔IC座 SIP L=17.0(大孔针)	
X : ±0.3	X° : ±5°	SIZE : A4	SCALE : 1:1
X.X : ±0.2	X.X° : ±1°	REV : A	Drawing No.
X.XX : ±0.1	X.XX° : ±0.5°	UNIT : mm	PROJECT
CRAW: BEN		CHECKED:	APPROVED:
DATE: 03/05/12		DATE:	