
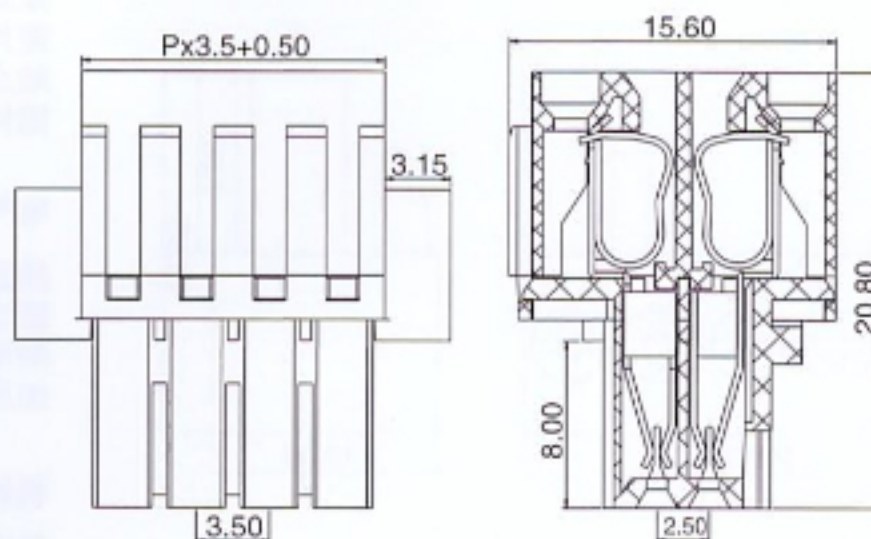


KF2EDGKEM-3.5

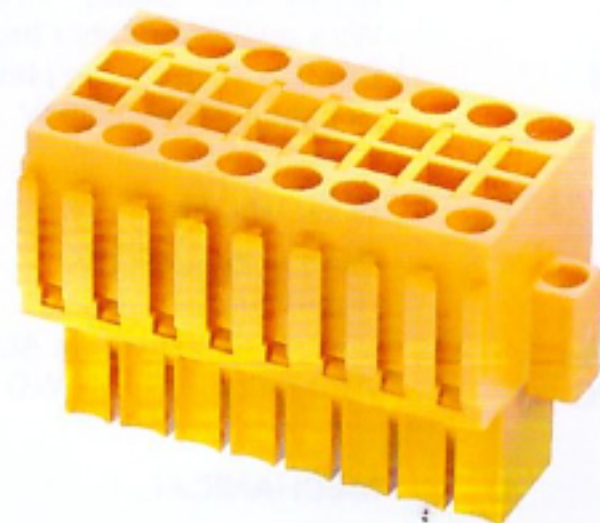

材质及电镀

间距: 3.5mm
极数: 2P-24P
触点材料: 黄铜、镀锡
弹片: 不锈钢
塑件: PA66.UL94V-0

电气性能

额定电压: 300V
额定电流: 8A
耐电压: AC2000V/1Min
使用线径: 28-12 AWG

机械性能

温度范围: -40℃~+120℃
瞬时温度: +250℃5秒
剥线长度: 9-10mm

认证: CE

材质及电镀

间距: 3.5mm
极数: 2P-24P
焊针: 黄铜、镀锡
塑件: PA66.UL94V-0

电气性能

额定电压: 300V
额定电流: 8A
耐电压: AC2000V/1Min

机械性能

温度范围: -40℃~+105℃
瞬时温度: +250℃5秒

认证: CE

MATERIAL

Pitch: 3.5mm
Poles: 2P-24P
Contact: Brass, Tin plated
Clips: stainless steel
Housing: PA66. UL94V - 0

ELECTRICAL

rated voltage: 300V
Rated current: 8A
Withstanding voltage: AC2000V/1Min
Wire range: 28-12 AWG

MECHANICAL

Temperature range: -40℃~+120℃
MAX soldering: + 250℃ for 5 sec.
Strip length: 9-10mm

MATERIAL

Pitch: 3.5mm
Poles: 2P-24P
Pin header: Brass, Tin plated
Housing: PA66. UL94V - 0

ELECTRICAL

Rated voltage: 300V
Rated current: 8A
Withstanding voltage: AC2000V/1Min

MECHANICAL

Temperature range: -40℃~+105℃
MAX soldering: + 250℃ for 5sec.

KF2EDGERM-3.5

