



RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

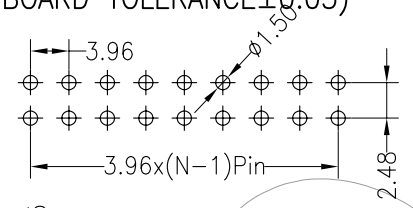

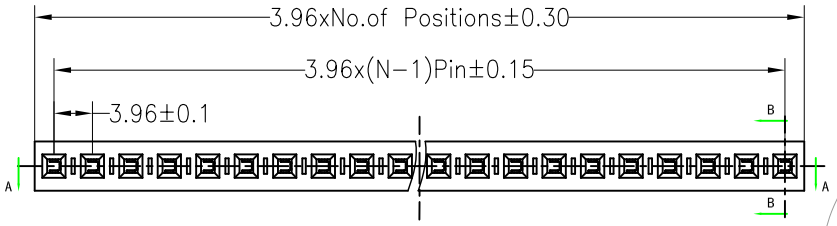



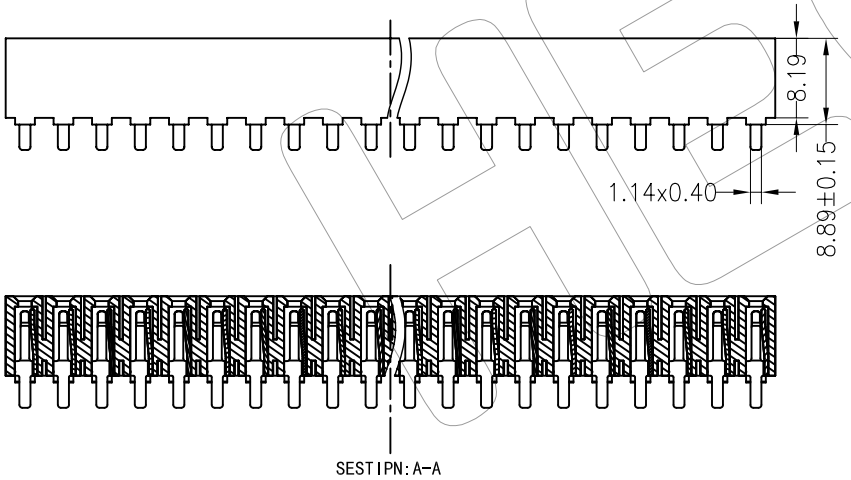

SPECIFICATIONS
Rated Current:7.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: LCP
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Ordering Information

HC-FH389 01 XX F N XX S U X 01

No.	Field	Description
1	No.of Pins Per Row	1*2~1*20
2	Insulator Material Option	A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 F=BK-LCP
3	Contact Plating	G0:Gold Flash S0:Gold Flash/Tin SN:Tin SM:Matte-Tin
4	Packing	0=PE Bag A=Tray T=Tube

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0		NEW DRAWING	

OPERATION		DRAW	Ayang	
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.	HC-FH38901XXFNXXSUX01
TITLE:	3.96mm H8.89 Single Row Straight Female Header