
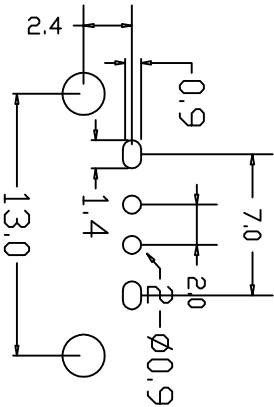
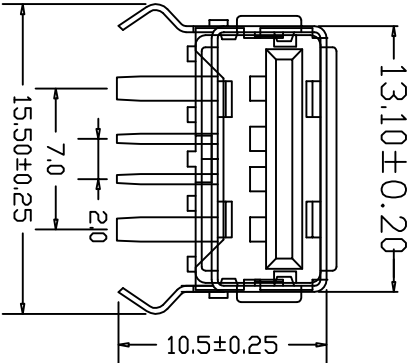
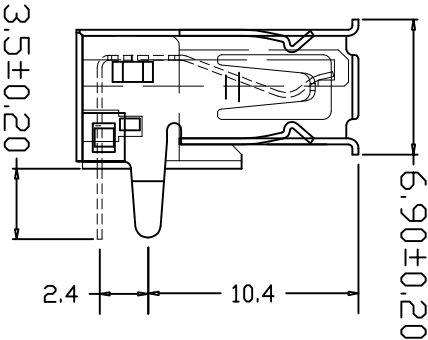


CAD FILE:

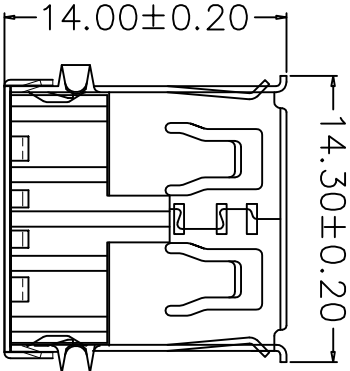

规格说明 Specifications:

电气特性 Electrical:

- 额定电流: Current Rating
3.0A/contact terminal
 - 额定电压: Voltage Rating
30V DC
 - 接触电阻: Contact Resistance
30 milliohms MAX
 - 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
 - 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN
- 物理特性 Mechanical:
- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
 - 端子保持力: Terminal Retention
1.0kgf(MIN)

原材料 Material:

1. 塑胶 Housing:

Hing Temperature Thermoplastics,

2. 端子 Contact: Copper Alloy C2680

3. 外壳 Shell: Copper Alloy C2680/SPCC

电镀 Finish:

1. 端子 Contact: Plated Gold in Mating Area;

端子四周镀 30-50U" 金, 镀金区域镀 1U"

2. 外壳 Shell:

每一接触面镀 50-80u" 金,

Nickel Plating

8					TOLERANCE UNLESS SPECIFIED					
7					WITHIN 1.5: ±0.1mm OVER 1.5: ±0.25mm ANGLES: ±2°	ISSUE	DATE	DESCRIPTIONS	APPD.	
6										
5										
4										
3	TERMINAL	BRASS	1		TITLE: USB JACK			UNIT: mm	DRWG. NO.:	
2	SHELL	SPCC	1		MODEL NO: USB-A-01 大电流			SCALE: 4:1	DWN	YINCONG
1	HOUSING	PBT	1	WHITE					CHK'D	ZHENGZHIHUI
NO.	DESCRIPTION	MATERIAL	QTY	PLATING	DONGGUAN JINBAOLI ELECTRONICS CO.,LTD				APPD.	LITIANJUN