


SSM SERIES


MINIATURE MICRO SWITCHES, DETECTOR SWITCHES UP TO 30VDC
SPDT, ALL PBT BODY AND PCB TERMINALS

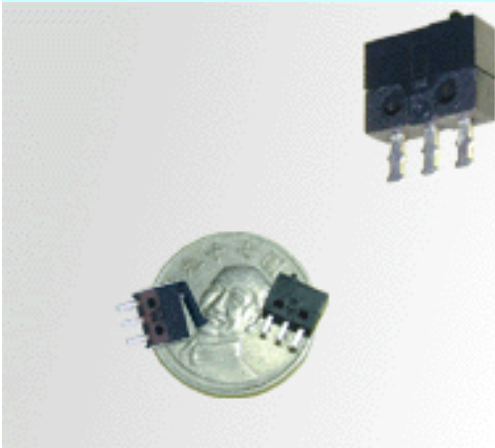

#Up to 250K life cycles upon request

- Rating: 30VDC, 500mA
- Initial contact resistance : 100m Ohm max.
- Insulation resistance : 100M min, at 250VDC
- Dielectric strength : 500 VAC for 1 minute
- Temperature range : -15 to +70 degrees in celsius
- Operating force: 50~120gf maximum
- Switch life: 100,000 cycles minimum
- Housing: PBT
- Cover: PBT
- Lever: PBT
- Actuator: POM
- Contacts: Silver alloy
- Terminals: Brass, silver plated



How to Order

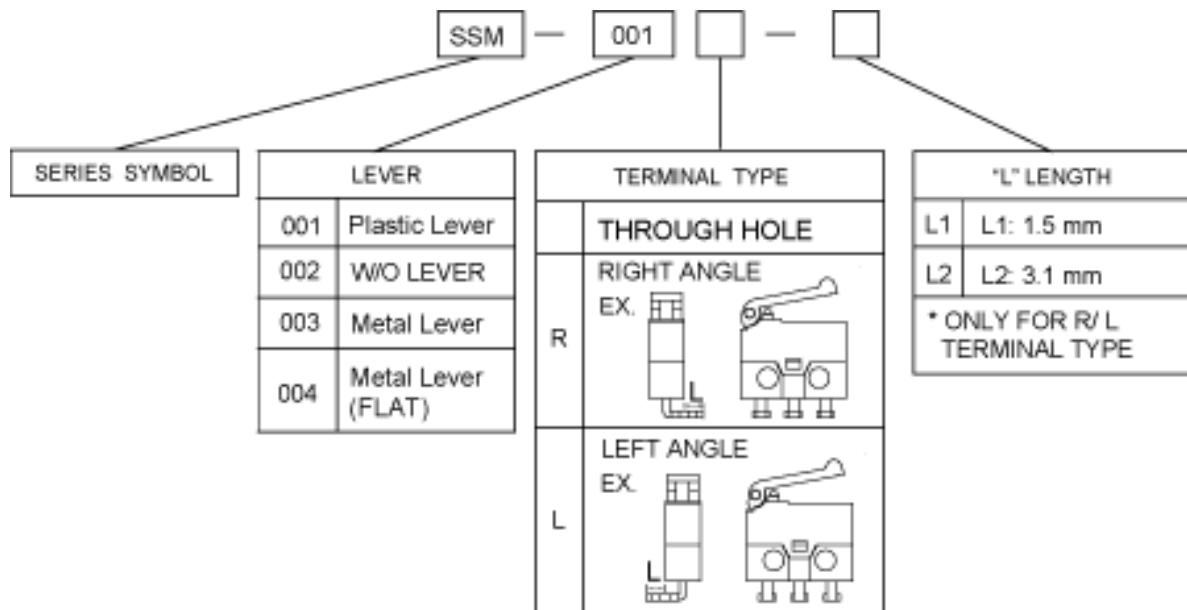





SSM-002

FP: 6.2 mm(MAX)
 DP: 5.6 ± 0.15 mm
 RP: 5.75 (MAX)
 DT: 5.45 (MIN)

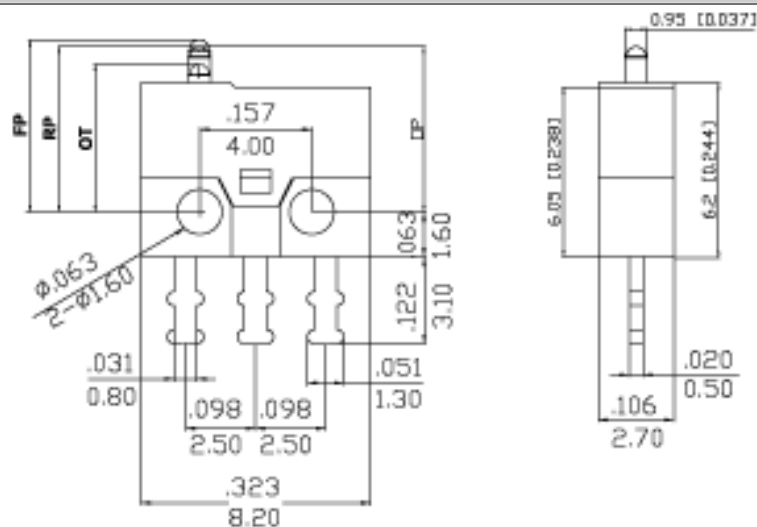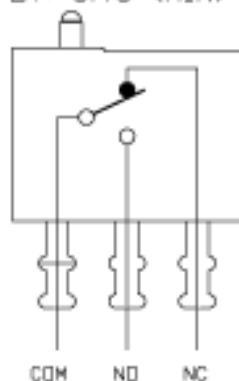

SSM-001

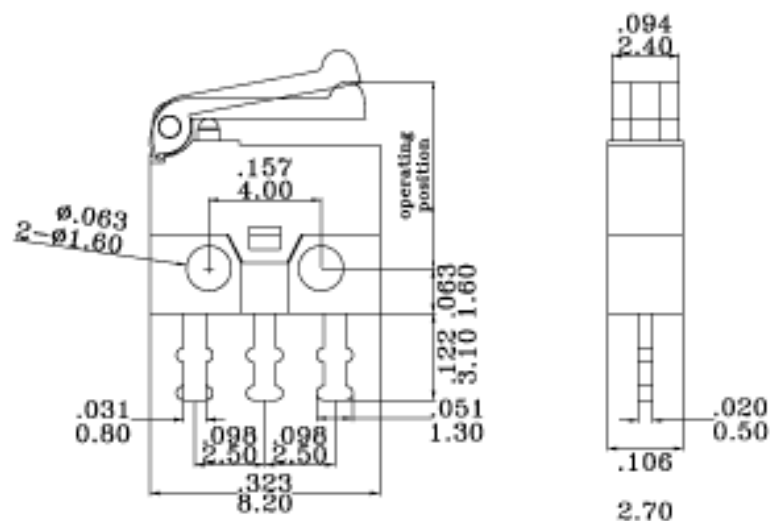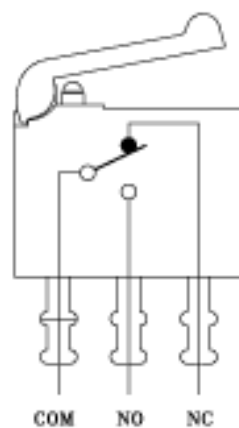

(With Lever & Right-Angled
 Terminals)

SSM-001R-L1/L2

