


UL3266

BORT cable

RoHS & REACH compliant

环保引领未来

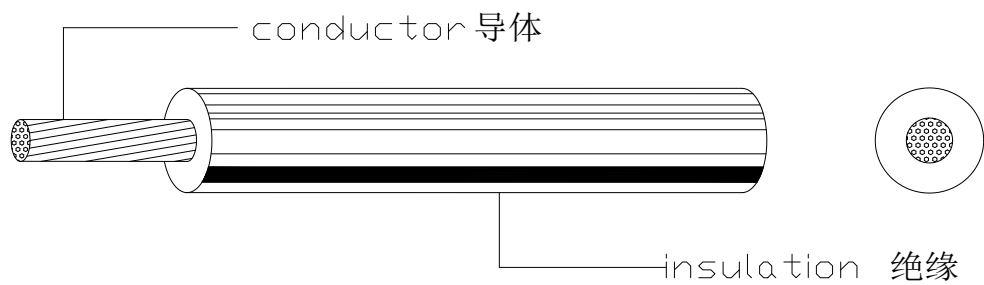

PRODUCT DESCRIPTION

- ★ Rated temperature: 125°C
- ★ Rated voltage: 300V
- ★ According to: UL Subject 758, UL1581, C22.2
- ★ Solid or stranded, tinned or bare copper conductor 32--10AWG
- ★ XLPE insulation
- ★ Passes UL VW-1 & CSA FT1 vertical flame test
- ★ Uniform insulation thickness of wire to ensure easy stripping and cutting
- ★ For general purpose internal wiring of appliance

产品说明

- ★ 额定温度: 125°C
- ★ 额定电压: 300V
- ★ 执行标准: UL758, UL1581, C22.2
- ★ 导体使用单根或绞合32--10AWG镀锡或裸铜丝
- ★ 交联聚乙烯绝缘
- ★ 通过UL VW-1以及CSA FT1垂直燃烧测试
- ★ 绝缘厚度均匀 易剥 易裁
- ★ 用于一般电子, 电器设备内部连线

Conductor		Finished product			Maximum Resistance at 20°C
AWG	NO. of Cond	Insulation Thick.	Outside Thick.	Packing	
	No./mm	mm	mm	m/r	Ω/mm
30	7/0.1	0.41	1.10	610	354.33
28	7/0.127	0.41	1.20	610	223.75
26	7/0.16	0.41	1.30	610	139.76
24	11/0.16	0.41	1.40	610	88.36
22	17/0.16	0.41	1.60	610	60.16
20	21/0.178	0.41	1.80	610	38.58
18	34/0.178	0.41	2.10	610	22.98
16	26/0.254	0.41	2.40	610	15.06
28	1/0.320	0.41	1.15	610	227.39
26	1/0.404	0.41	1.25	610	142.79
24	1/0.511	0.41	1.35	610	89.39
22	1/0.643	0.41	1.50	610	54.30
20	1/0.813	0.41	1.65	610	33.90
18	1/1.024	0.41	1.85	610	21.40

博尔特（漳州）电缆有限公司