


AVS

RoHS & REACH compliant

BORT cable

环保引领未来

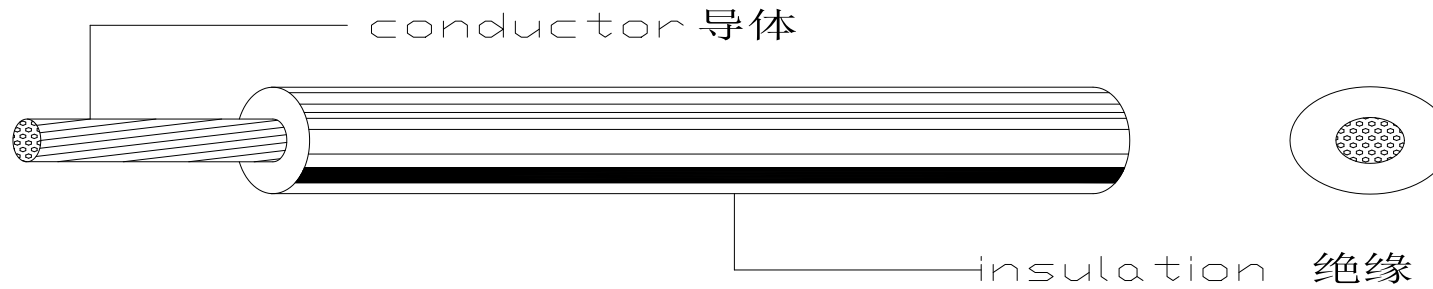

PRODUCT DESCRIPTION:

- ★Rated temperature:70℃
- ★According to JASO D 611-94
- ★Stranded,tinned or bare copper conductor
- ★PVC insulation
- ★Uniform insulation thickness of wire to ensure easy stripping and cutting
- ★Resistant to oil and abrasion
- ★Internal wiring in automobile where high flexibility thermo and mechanical strength are required

Conductor		Conductor			Maximum Resistance at 20℃
Cross Sectional Area	NO.of Cond	Cross Sectional Area	NO.of Cond	Weight	
mm ²	No./mm	mm ³	No./mm	kg/km	Ω/mm
0.3	7/0.26	1.3	7/0.27	6.59	50.20
0.5	7/0.32	1.5	7/0.33	8.93	32.70
0.85	16/0.26	0.5	2.2	12.08	22.00
0.85	11/0.32	0.5	2.2	12.35	20.80
1.25	16/0.32	0.5	2.5	17.04	14.30
2	26/0.32	0.5	2.9	25.66	8.81
3	41/0.32	0.6	3.6	40.12	5.59
5	65/0.32	0.7	4.4	62.22	3.52
0.3F	15/0.18	0.5	1.8	6.67	48.90
0.5F	20/0.18	0.5	2.0	8.52	36.70
0.75F	30/0.18	0.5	2.2	11.43	24.40
1.25F	50/0.18	0.5	2.5	16.93	14.70
2F	37/0.26	0.5	2.9	24.7	9.50
Note: The "F" in the table indicates that the conductor is a soft structure					

博尔特（漳州）电缆有限公司