
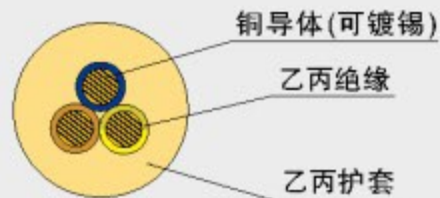


H05RR-F

FOR USE IN HEAVY-DUTY FACILITIES AND NORMAL ELECTRIC TOOLS • 应用于强电设备及一般电动工具

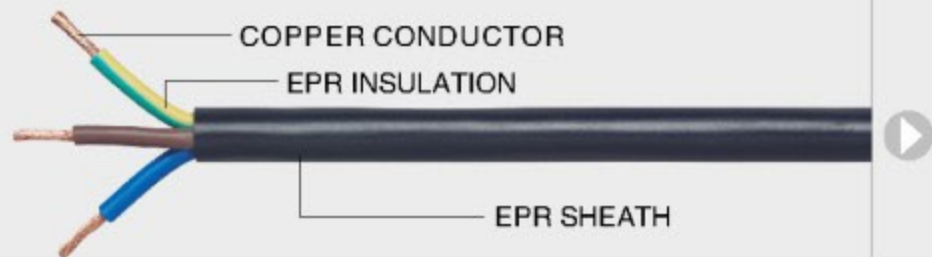

Standard: VDE0282
Rated Voltage: 300/500V
Max Temp: 60°C

Area (mm ²) 截面积	Conductor导体		Insulation 绝缘体	Sheath 护套	Mean overall平均外径	
	Construction (NO./mm) 结构	Diam.Of Single (mm) Max. 单支直径	Nom.thick(mm)厚度	Nom.thick(mm)厚度	Lower limit mm 下限	Upper limit mm 上限
2x0.75	24/0.2	0.21	0.6	0.8	5.7	7.4
2x1	32/0.2	0.21	0.6	0.9	6.1	8.0
2x1.5	48/0.2	0.26	0.8	1.0	7.6	9.8
2x2.5	49/0.25	0.26	0.9	1.1	9.0	11.6
3x0.75	24/0.2	0.21	0.6	0.9	6.2	8.1
3x1	32/0.2	0.21	0.6	0.9	6.5	8.5
3x1.5	48/0.2	0.26	0.8	1.0	8.0	10.4
3x2.5	49/0.25	0.26	0.9	1.1	9.6	12.4