


UL1028

RoHS & REACH compliant

BOR

环保型

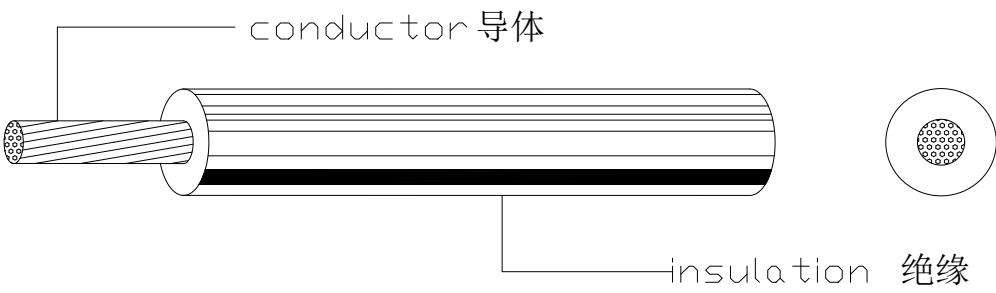

PRODUCT DESCRIPTION

- ★ Voltage Rating: 600V
- ★ Test Voltage: 2000V
- ★ Temperature: 105°C
- ★ Flame Test: Pass UL VW-1 & CSA FT1 vertical flammability
- ★ For general purpose internal wiring of electronic and electrical equipment ,Max temperature 60°C /80°C
- ★ The oil resistance type cable is available
- ★ Application standard : UL758, UL1581 & CSA C22.2 NO.210.2
- ★ Insulation: PVC
- ★ Color: Any
- ★ Characteristic: Uniform thickness of wire to ensure easy stripping and cutting. Oil-resistance, Resistance to acid and alkali, moistureproof, mould proof, environmental etc

产品说明

- ★ 额定温度： 105℃
- ★ 额定电压： 600V
- ★ 执行标准:UL758， UL1581， C22.2
- ★ 导体使用单根或绞合30--2/0AWG镀锌
- ★ 聚氯乙烯绝缘
- ★ 通过UL VW-1以及CSA FT1垂直燃烧试验
- ★ 绝缘厚度均匀 易剥 易裁
- ★ 用于一般电子， 电器设备内部连线

产品结构 CABLE CONSTRUCTION

导体 CONDUCTOR			绝缘 INSULATION		最大导体电阻 MAX.COND. RESISTANCE (Ω/km,20℃,DC)	I (A)
规格 AWG	构造 CONSTRUCTION (No./mm)	外径 DIA. (mm)	厚度 THICKNESS (mm)	外径 O.D. (mm)		
30	7/0.10	0.30	0.80	1.90	381	
28	1/0.32	0.32	0.79	1.90	227	
	7/0.127	0.38	0.81	2.00	239	
	7/0.127OS-1*	0.38	0.81	2.00	239	
26	1/0.404	0.40	0.80	2.00	143	
	7/0.16	0.48	0.81	2.10	150	
	7/0.16 OS-1*	0.48	0.81	2.10	150	
24	1/0.511	0.51	0.80	2.10	89.3	
	11/0.16	0.61	0.82	2.25	94.2	
	7/0.20OS-1*	0.60	0.83	2.25	94.2	
22	1/0.643	0.64	0.80	2.25	56.4	
	17/0.16	0.76	0.82	2.40	59.4	
	7/0.254 OS-1*	0.76	0.82	2.40	59.4	
	1/0.813	0.81	0.80	2.40	35.2	

20	1/0.813	0.81	0.80	2.40	35.2	
	26/0.16	0.94	0.81	2.55	36.7	
	7/0.32OS-1*	0.96	0.80	2.55	36.7	
18	1/1.024	1.02	0.82	2.65	22.2	
	41/0.16	1.18	0.81	2.80	23.2	
	7/0.404OS-1*	1.20	0.80	2.80	23.2	
16	1/1.29	1.29	0.81	2.90	14.0	
	26/0.254	1.49	0.81	3.10	14.6	
14	1/1.60	1.60	0.80	3.20	8.78	
	41/0.254	1.88	0.81	3.50	8.96	
12	65/0.254	2.36	0.82	4.00	5.64	
10	7/15/0.254	3.42	0.82	5.05	3.54	

T cable

引领未来

)

錫或裸铜丝

测试

耐压强度 DIELECTRIC STRENGTH VAC, 1min)
2,000
2,000
2,000
2,000
2,000

2,000
2,000
2,000
2,000
2,000
2,000