



Category

SWITCH

- ANTI-VANDAL SW

- ROCKER SW

- PUSH SW

- TOGGLE SW

- MICRO/DETECTOR SW

- SLIDE SW

- ROTARY SW

- DIP SW

- TACT SW

- LIGHTED TACT SW

- KEYLOCK SW

- CAPACITANCE SW

- PRESSURE SW

- SAFETY & CONTROL SW

- VEHICLE SW

- THERMOSTAT SW

- TRIGGER SW

- BATTERY SW

- CK series

SOCKET

WIRE HARNESS

BREAKER

FUSE HOLDER

FUSE

ENCODER

INDICATOR

POTENTIOMETER

CONNECTOR

WATERPROOF PARTS

NEW PRODUCT

Products Search

Search





OUR PRODUCT

Home » Our Product » CS-22J, CS-23E » CS-22J, CS-23E

SWITCH / TOGGLE SW

CS-22J, CS-23E

Remote control toggle switch, low voltage & low current, multi-position

DC 50V, 0.3A rating

2P2T, 2P3T functions

Shorting or non-shorting circuit

Screw and PCB mounting

Plastic or metal actuator type

PDF Download

Get Information

Print this page



Feature

- Rating: 0.3A DC 50V
- Contact resistance: 30mΩ Max.
- Insulation Resistance: 100MΩ Min.
- Dielectric strength: 250VAC
- Operating temperature: -20 to +70°C
- Life: 10K cycles
- Application: Remote controller, model vehicles & model airplane


Specification



CS-22J03-AT15

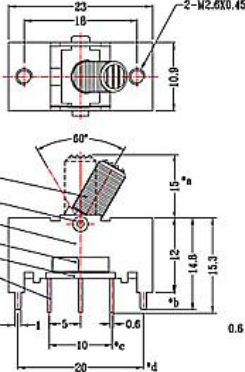

SCHEMATIC (NON-SHORTING)




P.C.B LAYOUT
BOTTOM VIEW

www.c-components.com.tw/prodDetail.asp?id=445

1/2



CS-23E01AC10

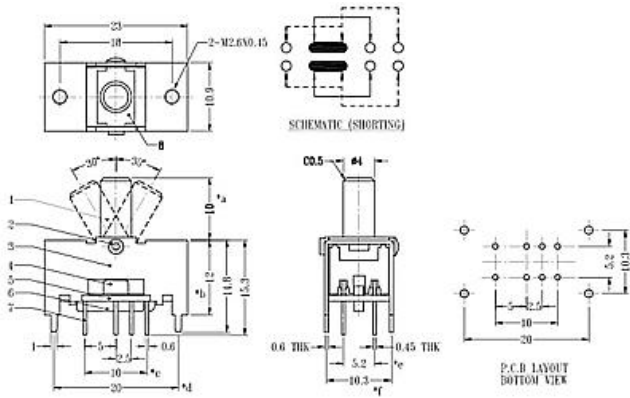

[BACK](#)



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.

Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved