RoHS COMPLIANT



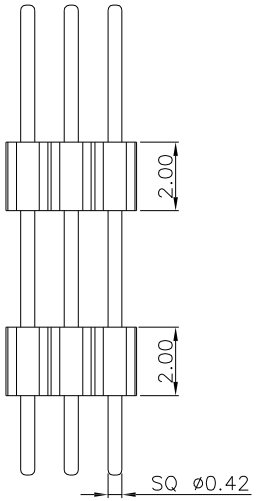

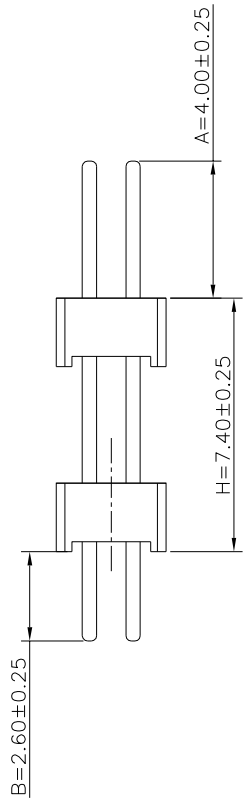



TOLERANCE: ±0.05
RECOMMENDED PCB LAYOUT
(TOP VIEW)

SPECIFICATIONS

Current Rating :1AMP
Operation Temperature :-40°C to+105°C
Contact Resistance :20m Ω Max
Insulation Resistance :1000M Ω Min
Withstanding Voltage :AC 300V
Insulator Material :Polyester(UL:94V-0)
Standard:LCP
Contact Material : Phosphor bronze
Contact plating :Au or Sn Plated

Part no:
JTP127DL37- 2 03 x B2N198

- 2: Single
- 03: Pin no
- x: G-Gold Plated, S-Tin Plated
- B2N198: B-Bag

M&T **MTCONN ELECTRONICS CO.,LTD**

DIM	TOL	DEC	TOL
X.	±0.50	X.°	±2°
X.X	±0.35	X.X°	±2°
X.XX	±0.20	X.XX°	±--
X.XXX	±0.10	X.XXX°	±--

DRWN: SAIMEN 2021-05-06	PART NO.: JTP127DL37-203xB2N198
CHKD: JOHNSON 2021-05-06	TITLE:Pin Header 1.27mm H7.4 180°DIP Double Plastic
APPD: WILLIAM 2021-05-06	DRAWING NO.: JTP127DL37-203xB2N198
SHEET: 1/1	UNIT mm / SCALE N/A / SIZE A4 / REV A