







TS4

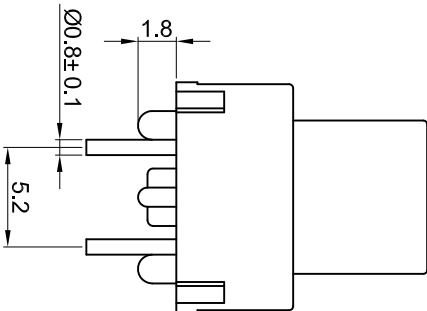


Specifications

- Circuit :SPST
- Current rating :30mA
- Voltage rating :30VDC
- Dielectric withstanding voltage :500VAC for 1 minute
- Contact resistance :100mΩ Max. (Initial)
- Insulation resistance :100MΩ Min
- Operating force :200±50gf
- Total travel :0.7mm±0.2mm
- Operating life :100,000 cycles Min.
- Solder specifications :260±5° C for 5 seconds
- Operating temperature :-20° C ~ +70° C

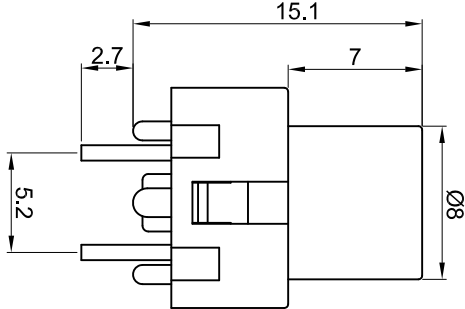

CIRCUIT



MATERIAL:

Frame:Nylon66,UL rated:94V-2 Min. ;
Cap:ABS;
Terminal:Brass,Gold or Tin plated.

P.C.B.LAYOUT

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
O	Orange	橙色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

公差 TOLERANCES			视角	比例尺	NONE	日期	角度	单位. DIMENSION UNIT	
			VIEWING ANGLE	SCALE		DATE	ANGLE ±5°	mm.	
A1	规格标准更新	2023.03.03	N/A			2023.03.03		品名	TITLE
A0	发行	2011.12.01	N/A					图号	DRAWING NO
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	核对	Sinc	绘图	SHAOFEI Ma
								TS4-3XN	TS4-3XN_CP_A1