

1. Application 用途

◆ Industrial, Automotive, New energy and so on


2. Features 特性

- ◆ Comply with AEC-Q200,IEC62368
- ◆ ROHS、Reach Compliant
- ◆ Operating Temperature Range: -40℃ to +155℃




3. Picture 图片



4. Schematic 原理图

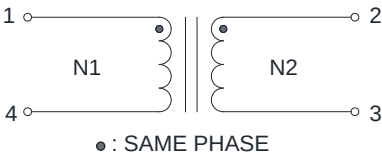

5. Dimension (Unit: mm) 外形尺寸

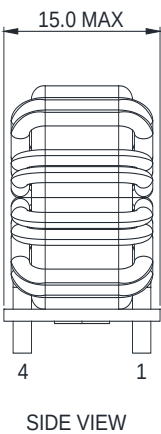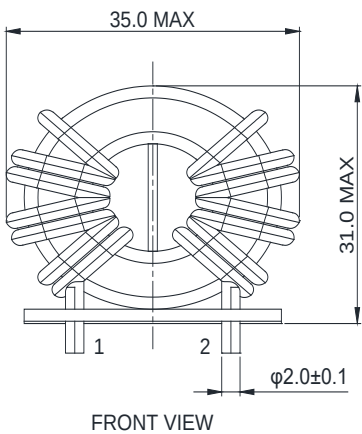

6. Electrical Characteristics 电气特性

Electrical Specifications@25℃									
Part NO.	Inductance (mH)		Lk(uH)	Turns Ratio	DCR				HI-POT(VAC)
	100KHz,1V	100KHz,1V	100KHz,1V	20KHz,1V	(mΩ MAX)				2mA/5S
62815-01	1-4	2-3	/	N1:N2	1-4	3-4	/	/	N1-N2
	0.54 MIN	0.54 MIN	/	1:1	2.5	2.5	/	/	2500