

Features


- ▶ Due to the low profile design, it is suitable for surface mount.
- ▶ High impedance characteristic has been achieved a superior effect for common mode noise suppression.
- ▶ Have achieved miniaturization while keeping characteristics by adoption of exclusive square type closed magnetic cores.




Applications

- ▶ For DC power lines (elec-tronics control equipment, multi-media etc).

Dimension (Unit:mm)

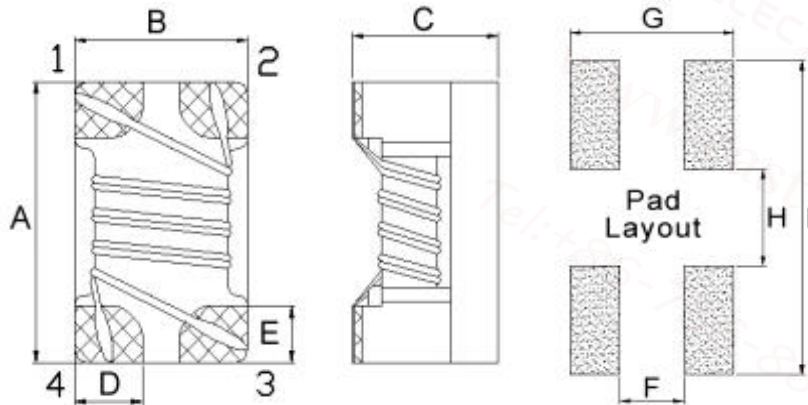


Circuit Diagram

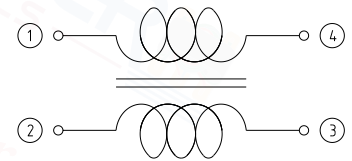

A	B	C	D	E	F	G	H	I
2.0±0.2	1.2±0.2	1.2±0.1	0.35 Typ.	0.40 Typ.	0.40 Typ.	1.20 Typ.	1.20Typ.	2.70 Typ.

Applications Circuit

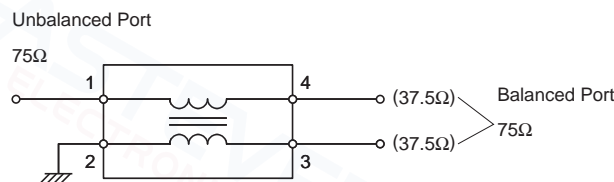

Specifications

Freq.Range(MHz)	UB/B Impedance(Ω)	Insertion Loss(dB)	Rated Voltage(DC)	DCR(Ω)	Insulation Resistance Min. (MΩ)	Rated current(mA)
50~1200	75/75	1.2 MAX	20V	0.7	10	280

- (1).Rated Current: Temp.rise 40°C Typ
- (2).Operating Temperature: -40°C up to +85°C
- (3).Storage Temperature: -55°C up to +105°C

Packaging

Package quantity : 2000(pcs/reel)