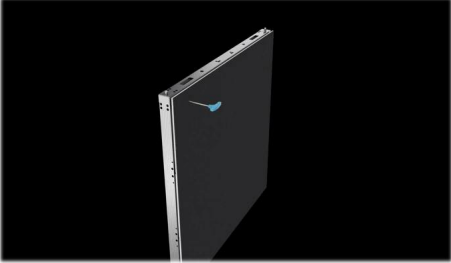
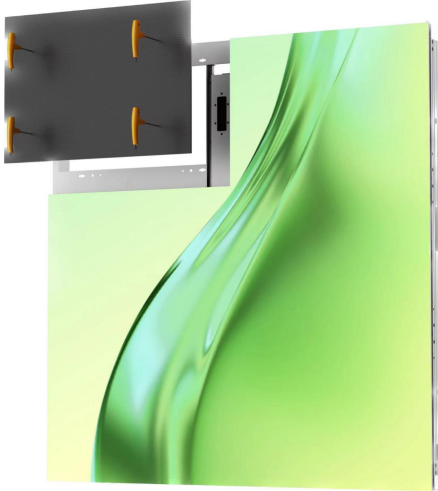
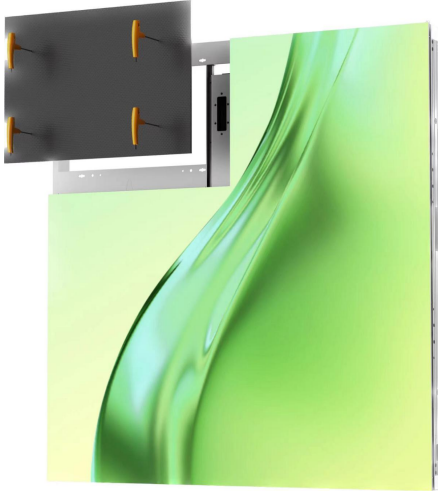
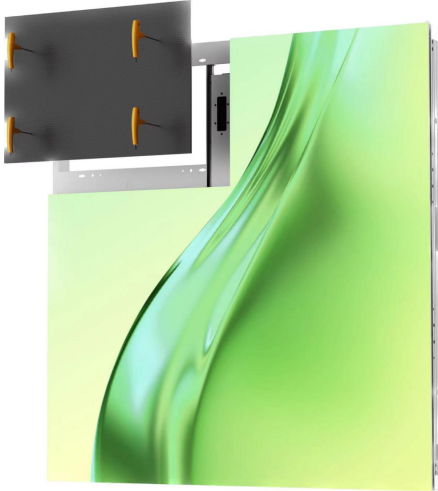


Shenzhen D-King Photoelectric Technology Co., Ltd

P10 Outdoor display Technical Parameters

Product parameters			Company product display area
1	Pixel Pitch 点间距	10 mm	
2	Pixel Configuration 像素基色	1R1G1B	
3	LED type (Nationstar) LED类型	SMD2727	
4	Module Size(W×H)mm 模组尺寸(W×H)mm	480x320 mm	
5	Module Resolution(W×H) 模组分辨率(W×H)	48X 32 dots	
6	Cabinet Size 箱体尺寸	960*960mm	
7	Box Resolution 箱体分辨率	96X96 dots	
8	Pixles 像素密度	10000 dots/m²	
9	Cabinet Material 箱体材料	Die-cast aluminum	
10	Cabinet weight 机柜重量	28kg	
11	Screen Brightness 屏幕亮度	≥5000 cd/m²	
12	Color Temperature 色温	6000~12000K adjustable	
13	Driving Method 驱动方式	1/2 scan	
14	H/V Visual Angle 水平/垂直视角	≥140°/≥120°	
15	Best Viewing Distance 最佳视距	3m - 200m	
16	Max. Power Consumption 最大功耗	≤800W/m²	
17	Average Power Consumption 平均功耗	≤320W/m²	
18	Gray Level 灰度	14bit	
19	Display Color 显示颜色	16 M	
20	Frame 帧频	≥ 60Hz	
21	Refresh Frequency 刷新频率	3840~7680Hz	
22	Uninterrupted Working Hours	≥72 hours	
23	Screen Life-span 寿命	≥100,000 hours	
24	MTBF 平均无故障时间	≥5,000 hours	
25	Discrete Blind Spot Rate 离散盲点率	<1/10000	
26	Continuous Blind Spot Rate 连续盲点率	None	
27	Blind Spot Rate 盲点率	<1/10000	
28	Protective Scale 防护秤	IP65	
29	Screen Plainness 屏幕平整度	<±1mm	
30	Power Supply Mode 供电方式	AC220±10% 50Hz / AC110±10% 60Hz	
31	Environment Temperature & Humidity 工作环境温度&湿度	Temperature : -20℃ ~ +60℃ Humidity: 10%~90%RH	
32	Control System 控制系统	Synchronous control	
33	Video signal 视屏型号	DVD,VCD,Television, commercials, video, live video, pictures, text	
34	Control system transmission 控制系统传动	Ethernet cable control	
35	Adopted spare parts 组装配件	Module,Leds, IC, cables etc.	
36	Operating System 操作系统	Windows10/NT/XP/Vista	
37	Certificates 证书	CCC、CE,ROHS,FCC,IC,PSE	
38	Software 软件	Novastar -Huidu-colorlight	