
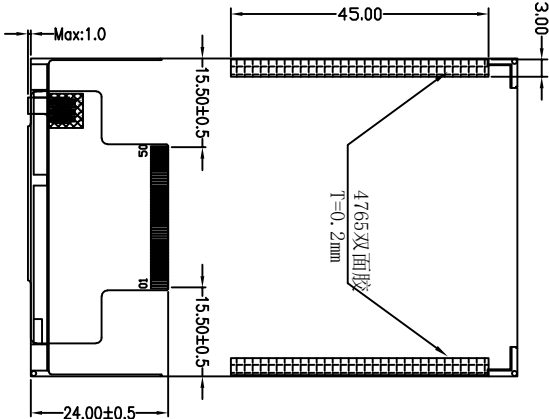



接口定义

PIN	DESC	PIN	DESC
1	GND	26	DB6
2	A	27	DB7
3	K1	28	DB8
4	K2	29	DB9
5	K3	30	DB10
6	K4	31	DB11
7	K5	32	DB12
8	K6	33	DB13
9	GND	34	DB14
10	GND	35	DB15
11	VCI	36	DB16
12	VCI	37	DB17
13	RESET	38	ENABLE
14	CSX	39	DOTCLK
15	D/CX	40	HSTXNC
16	WR/SCL	41	VSXNC
17	RDX	42	IM2
18	S0A	43	IM1
19	S0O	44	IM0
20	DB0	45	GND
21	DB1	46	YU(NC)
22	DB2	47	XL(NC)
23	DB3	48	YD(NC)
24	DB4	49	XR(NC)
25	DB5	50	GND

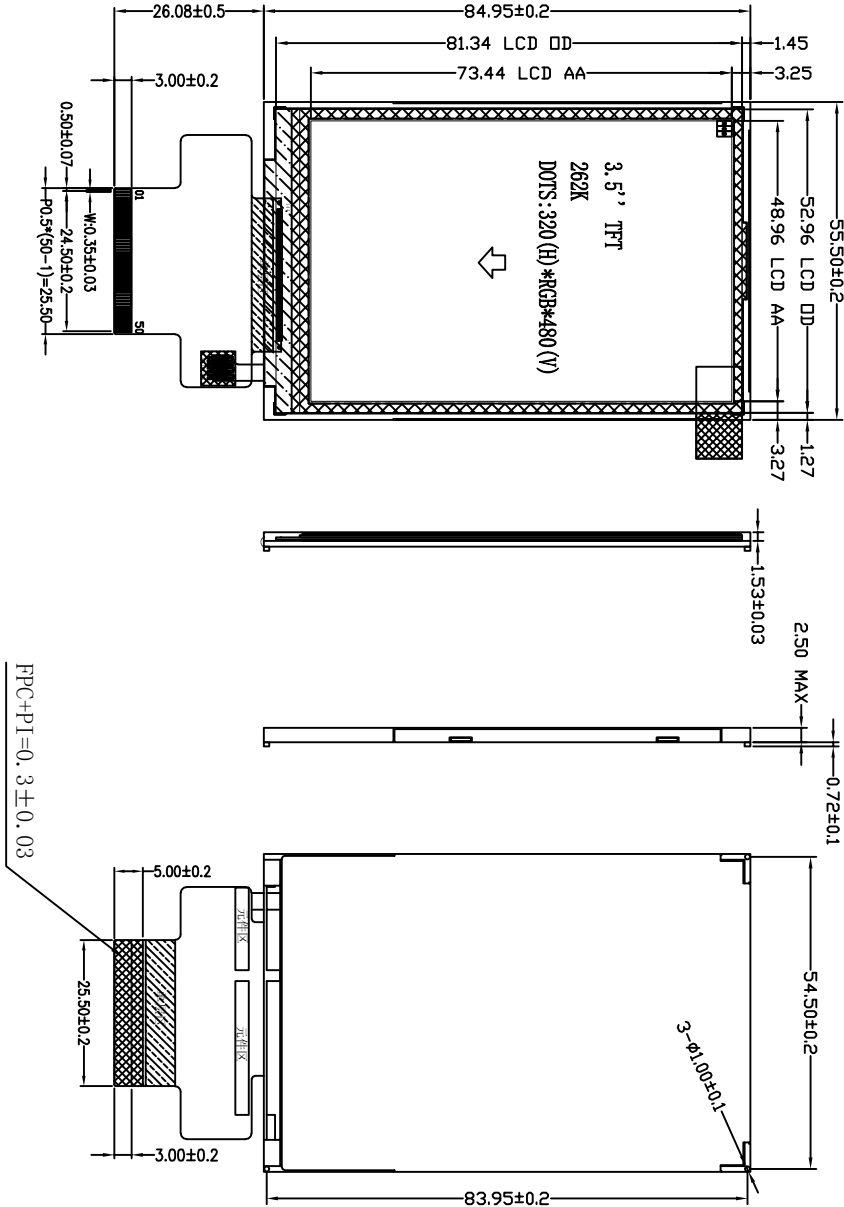

Note: ROHS

1. Display Modle: 3.5'' TFT/TN
2. Driving Condition: VDD=2.8V
3. Viewing Direction: 12H
4. Operating Temp: -20~+70° C
5. LCD: PH035NA-01B
6. IC: IL19488
7. Backlight: WHITE LED*6
8. Unspecified tolerance is $\pm 0.20\text{mm}$
9. ROHS Request



IM=120MA IF=3.2V



深圳金视界光电科技有限公司
SHENZHEN GOLDEN VISION OPTOELECTRONIC CO., LIMITED

SCALE: 1/1	UNIT: mm	DATE	PAGE: 1/1	CHECK	DESIGNER
MODEL NO.:	GWH0350HV29S	APPROVE	CHECK	DESIGNER	
PART NO.:					