

CURRENT SENSOR RECTANGULAR SPLIT 50/60 HZ SCTK751AT SERIES

FEATURES:

- For use in 50/60 Hz.
- Rated current up to 200 Amps.
- Output voltage accuracy $\pm 1\%$.
- Burden resistor built-in.




ELECTRICAL CHARACTERISTICS:

SCTK751AT-01	I _{rms} (Amp) ¹	V _{rms} (V)	A nom. mm	B nom. mm	C nom. mm	D nom. mm	E nom. mm	F nom. mm
SCTK751AT-02	1	0.333	50.8	12.0	53.34	19.05	19.05	619.6
SCTK751AT-03	2	0.333	50.8	12.0	53.34	19.05	19.05	619.6
SCTK751AT-04	5	0.333	50.8	12.0	53.34	19.05	19.05	619.6
SCTK751AT-05	10	0.333	50.8	12.0	53.34	19.05	19.05	619.6
SCTK751AT-06	20	0.333	50.8	12.0	53.34	19.05	19.05	619.6
SCTK751AT-07	30	0.333	50.8	12.0	53.34	19.05	19.05	619.6
SCTK751AT-08	50	0.333	50.8	12.0	53.34	19.05	19.05	619.6
SCTK751AT-09	70	0.333	50.8	12.0	53.34	19.05	19.05	619.6
SCTK751AT-10	100	0.333	50.8	12.0	53.34	19.05	19.05	619.6
SCTK751AT-11	150	0.333	50.8	12.0	53.34	19.05	19.05	619.6
SCTK751AT-12	50	1.0	50.8	12.0	53.34	19.05	19.05	619.6
SCTK751AT-13	75	1.0	50.8	12.0	53.34	19.05	19.05	619.6
SCTK751AT-14	100	1.0	50.8	12.0	53.34	19.05	19.05	619.6

1. V_{out} tested at Rated Current.

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS:

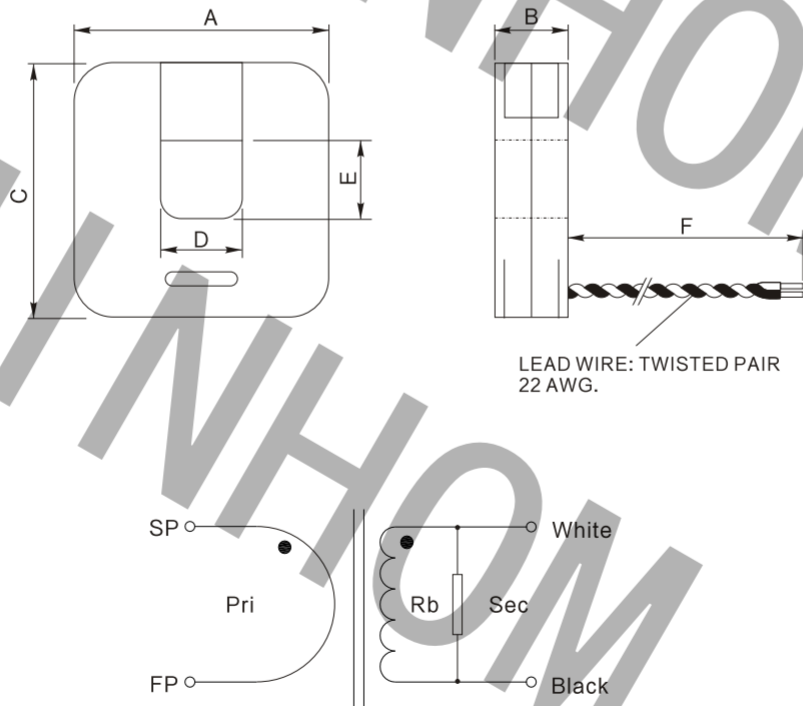

Note: All specifications subject to change without notice.