
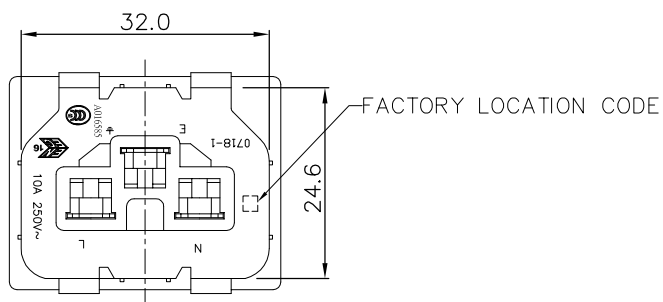

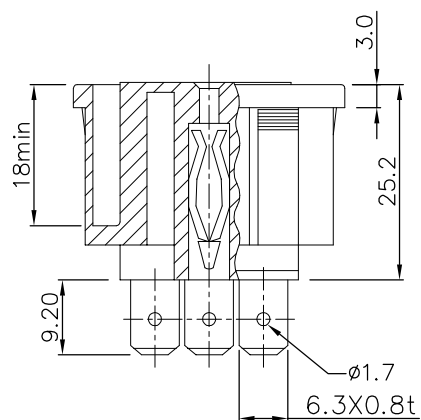


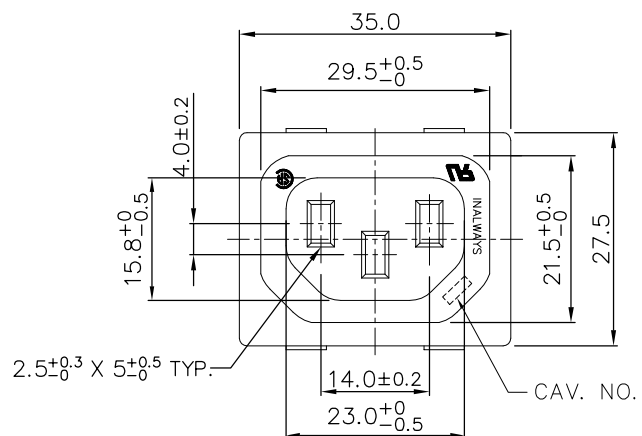

SPECIFICATION

A. MATERIAL:

1.HOUSING: NYLON 66 FLAMMABILITY UL 94V-0

2.TERMINAL: COPPER ALLOY, TIN-PLATED

B: CHARACTERISTICS:


1.RATING: 10A 250V~

2.INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC

3.ELECTRIC STRENGTH: AC 2,000V FOR ONE MINUTE

C: APPROVALS:

UL, CSA, ENEC & CCC

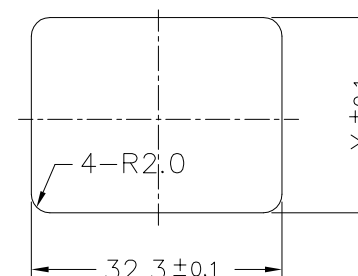

THICKNESS:

0.8~1.2t X=25.2

1.3~2.0t X=25.4

PANEL CUT-OUT



深圳易凯达科技有限公司
WIN-KARE TECHNOLOGY CO.,LTD.

PART NO.:
0718-1-PW

NAME:
AC OUTLET 3P
(SNAP-IN)

MATERIAL:
SEE ABOVE

SPEC.:
IEC 60320-2-2
SHEET F

APPROVED

CHECKED

DESIGNER

NOTE:

研发部
2020.07.23
兰锐

研发部
2020.07.23
兰锐

DOC NO:

S718-0007

REV	DATE	DOCUMENT	DESCRIPTION
E			
D			
C	2011.10.10	DGR11008	CHANGE SAFETY MARK
B	2008.11.25	DGR08065	CHANGE DIMENSION
A	04-12-06	DGR06039	NEW REVISION

TOLERANCE UNLESS OTHERWISE MARKED			
DIMENSION:		ANGULAR:	
.000	: ±0.1	±3°	
.00	: ±0.2		
.0	: ±0.3		
A	UNIT	SCALE	SHEET
4	mm	1 : 1	1 of 1