






PB05A

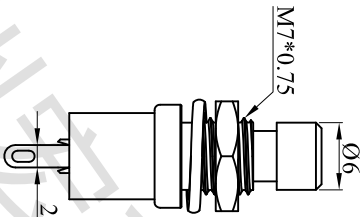

Rating: 1A 36VDC
1A 125VAC / 0.5A 250VDC
Contact Resistance: 50mΩ Max.
Insulation Resistance:DC 500V 100MΩ Min.
Dielectric Strength:AC 1000V 1 minute
Total travel:2.0± 0.5mm
Operating Force:400± 100gf
Electrial Life:10,000 cycles
Mechanical Life:5,000 cycles
Operating Temperature:-20° C~70° C
Function: OFF - ON

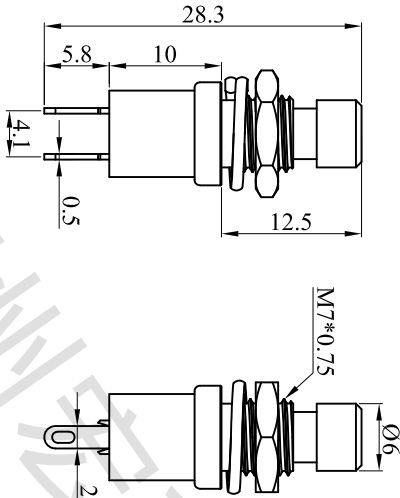

Panel Thickness: 3mm MAX.

CUT-OUT

MATERIAL:
Base:Brass,Ni plated;
Cap: ABS ;
Terminal: Brass,Gold plated;
Nut:Zn Alloy,Ni plated;

公差 TOLERANCES			.X± 0.3		.XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT		mm.	
视角 VIEWING ANGLE			比例尺 SCALE		NONE		日期 DATE		品名 TITLE		图号 DRAWING NO	
核 准 APPROVED BY			核 对 CHECKED BY		Sinc		绘图 DRAWN BY		Mshaofei		PB05A-R	
Richard			Richard		NONE		2017. 12. 16		PB05A-R		PB05A-R_CP_A0	
日期 DATE			ECN NO.		N/A		2017. 12. 16		变更说明 CHANGE DESCRIPTION		A0	
版本 VER.			New Issue		A0		2017. 12. 16		变更说明 CHANGE DESCRIPTION		A0	