


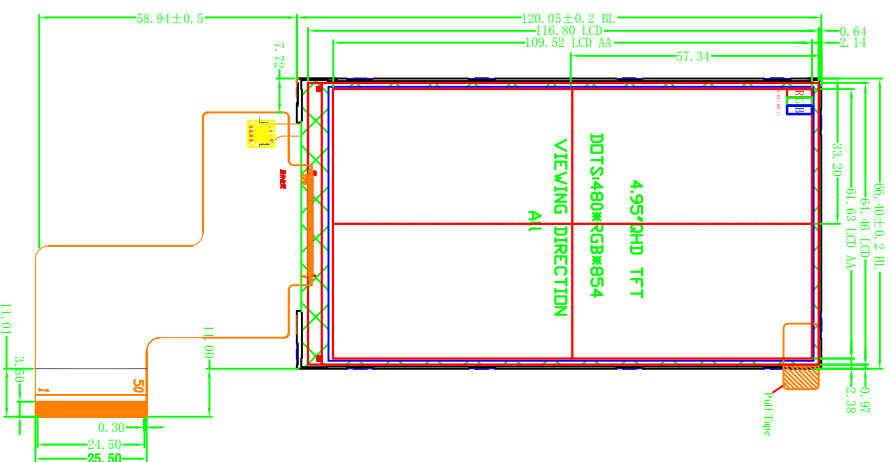
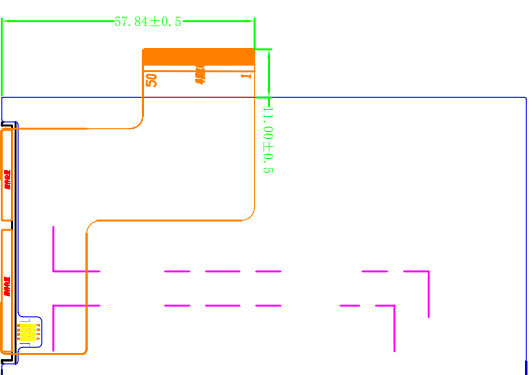




- Notes:
1. " " IS CRITICAL DIMENSION.
 2. " () " IS REFERENCE DIMENSION.
 3. PRODUCT CONFORM TO RoHS STANDARD.
 4. 建议外壳可视区域比模块可视区域Voids单边小0.3mm, 并保证在AA区之间.

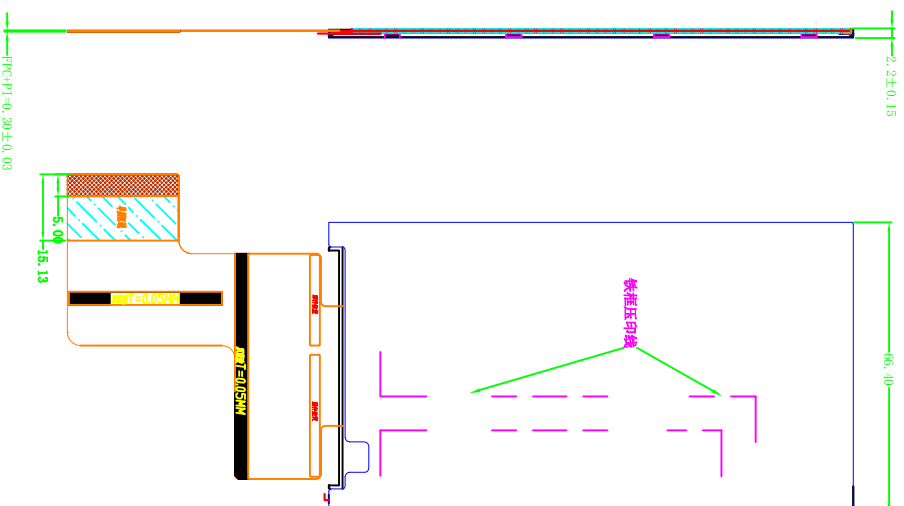

弯折示意图



PodNo	Pod Name
1	LEDA
2	LEDA
3	LEDK
4	LEDK
5	IM0
6	IM1
7	GM1
8	LCM ID= VDD
9	VDD
10	R0
11	R1
12	R2
13	R3
14	R4
15	R5
16	R6
17	R7
18	R0
19	G1
20	G2
21	G3
22	G4
23	G5
24	G6
25	G7
26	B0
27	B1
28	B2
29	B3
30	B4
31	B5
32	B6
33	B7
34	GND
35	DLCK
36	TE
37	HSNVC
38	VSNC
39	DE
40	RSET
41	RD
42	XR
43	YD
44	XL
45	YU
46	CS
47	SD
48	SOL(MR)
49	RS
50	GND

DISPLAY TYPE	4.95", Transmissive, NW TFT, 16.7M color
DISPLAY RESOLUTION	480*854 DOTS
VIEWING DIRECTION	IPS (GSI)
LCD DRIVER IC	ILI9806E-2C
POWER SUPPLY	Vcc=2.8V
INTERFACE	
CONNECTOR	FH12A-50S-0-5
BACK-LIGHT	12 WHITE LEDs, Vf=18V (If=40mA)
OPERATION TEMPERATURE	-20 °C ~ +70 °C
STORAGE TEMPERATURE	-30 °C ~ +80 °C

	按照客户要求PFC改短14MM	LONG 2016.07.06
ISSUE	AMENDMENT	NAME DATE
 0	First issue	LONG 2016.05.27

TOLERANCE UNLESS OTHERWISE SPECIFIED:		LINER:	Xx 40.3
DIMENSIONS IN: MM		SIZE:	A4
MATERIAL: PART MATERIAL THICKNESS: 0.650/2MM		ANGLE:	0.1°
SCALE: DRAWING SCALE FINISH: FINISHED		 THIRD ANGLE PROJECTION	
SIGN		DATE	
DRAWN			
CHECKED			
APPROVED			
			
三圆科技有限公司 SANYUAN TECHNOLOGY CO., LTD			
TITLE: MODULE_SPECIFICATION			
ITEM NO.:MS-Y50018H00N		REV.: V17	
DWG NO.:Y50018H00N. DWG SHEET:1/1			