





WIN-KARE TECHNOLOGY CO.,LTD







0717-2S Series

Power Entry Module EN60320 C14 + Fuseholder + Switch (DPST)

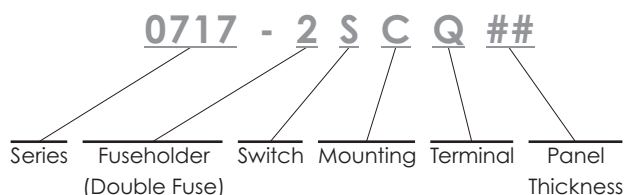

► Specification	► Inlet	► Rocker Switch
Power Rating	10 A 250 V AC	10 A 250 V AC
Electric Strength	AC 2,000 V for 1 Minute	AC 1,500 V for 1 Minute
Contact Resistance	30 mΩ Max.	20 mΩ Max.
Insulation Resistance	100 MΩ Min. at 500 VDC	100 MΩ Min. at 500 VDC
Operating Temperature	+70°C	+ 65°C (North America) + 90°C (Europe)
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy	Thermoplastic UL Flammability 94V-2 & Copper Alloy
Mounting	C : Screw-on P : Snap-in	Double Pole (On / Off Switch)
Terminal	Q : Q.D / Solder Tab, 4.8 X 0.8 S : Solder Tab, 3.5 X 0.8	Q.D Tab, 4.8 X 0.8 Solder Tab, 3.5 X 0.8
Panel Thickness	Snap-in Panel Thickness : 1.0 / 1.2 / 1.5	

Unit : mm

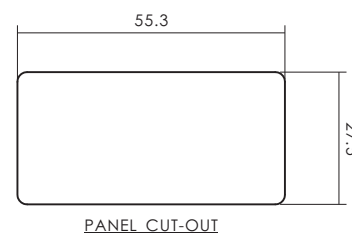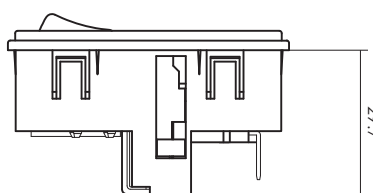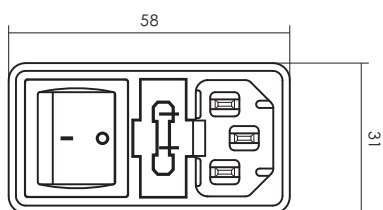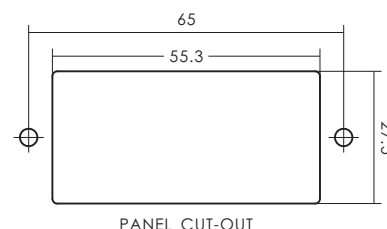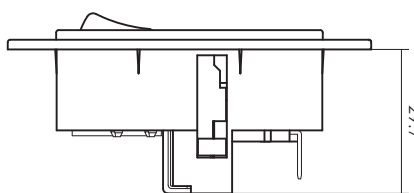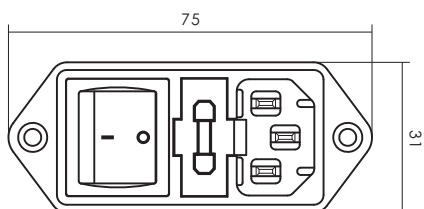

Tel:+86-755-25003073;Fax:+86-755-25003079

Http:\\www.win-kare.com; Mail:service@win-kare.com

