
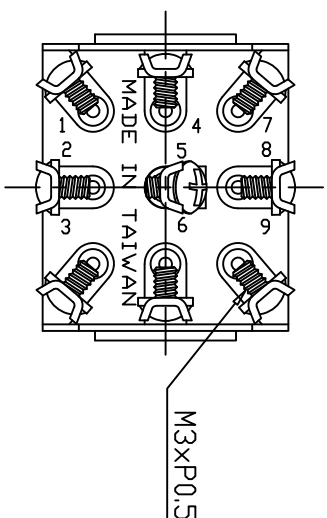
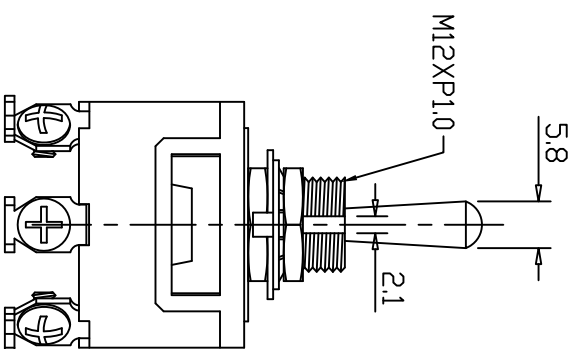
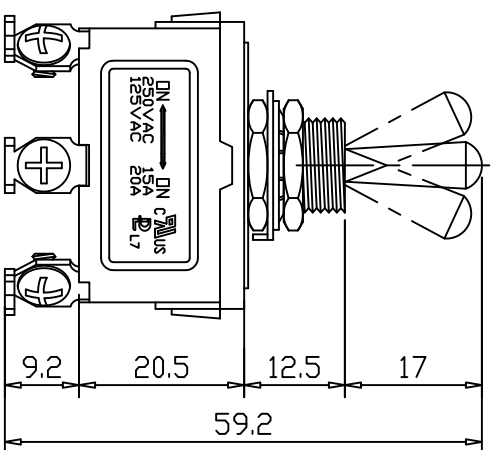


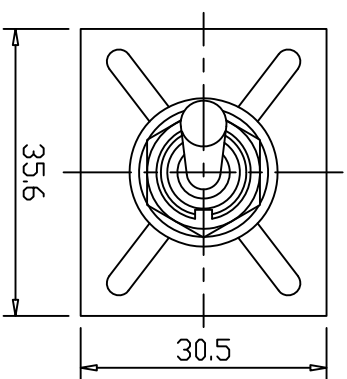

MODEL NO.	SWITCH FUNCTION			TERMINAL QUANTITY	CONNECTED TERMINALS		
	POS.1	POS.1	POS.1		POS.1	POS.1	POS.1
708-2	DN	NONE	DN	9P	1-2,4-5 7-8	—	2-3,5-6 8-9
708-4	<DN>	NONE	DN	9P	1-2,4-5 7-8	—	2-3,5-6 8-9
708-3	DN	OFF	DN	9P	1-2,4-5 7-8	—	2-3,5-6 8-9
708-8	MDM	OFF	DN	9P	1-2,4-5 7-8	—	2-3,5-6 8-9
708-6	MDM	OFF	MDM	9P	1-2,4-5 7-8	—	2-3,5-6 8-9

MDM=MDMENTARY

SPECIFICATION

- 1.PATING:10A 250VAC,15A 125VAC
15A 250VAC,20A 125VAC
- 2.INSULATION RESISTANCE:DC 500V 200MΩ DR MORE
- 3.CONTACT RESISTANCE:DC 2-4V 1A 20MΩ DR LESS
- 4.WITHSTAND VOLTAGE:AC 1500V DR MORE

端子種類 Termination Options

H1	H2	H3	H4	H5

產品
PRODUCT

POWER TOGGLE SWITCH

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

比例
SCALE

1 : 1

單位
UNIT

MM

公差
TOLERANCE

±0.3MM