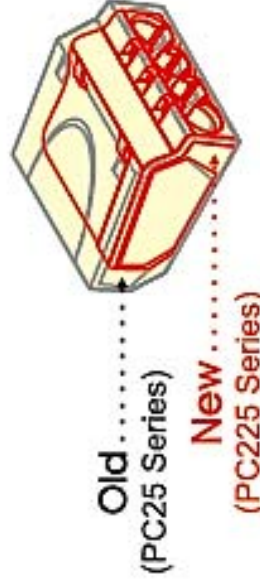





Push-In Wire Connectors, Compact

- Polycarbonate and polyamide 66, UL 94V-0 flame-retardant shell, rated at T85 (IEC), 105°C/221°F (UL).
- Spring force connector constructed from tinned steel plate with copper strip and stainless spring steel.
- Color-coded clear shell offers visual verification of connection.
- About 25% more compact in size than old types with cost-saving effectiveness.
- Recommend reusing with a wire at least one size larger than the wire previously removed.
- Certified to IEC/EN 60998.



Around 25% space-saving

PC225* SERIES		PC2258
Electrical Ratings & Wire Range	24A, 450V, T85°C 0.5-2.5 mm ² , Rigid	600V, 105°C (221°F) 22-12 AWG, Sol Cu
Approvals	CE 	

Dimensions (mm)	Cat. No.	Color	Poles	Packing
	PC2252	Red + Clear	2	Box of 100 Carton of 10,000 (10 bags, 1,000 ea.)
	PC2253	Orange + Clear	3	Box of 100 Carton of 8,000 (10 bags, 1,000 ea.)
	PC2254	Yellow + Clear	4	Box of 100 Carton of 5,000 (10 bags, 500 ea.)
	PC2255	Grey + Clear	5	Box of 100 Carton of 5,000 (10 bags, 500 ea.)
	PC2258	Black + Clear	8	Box of 50 Carton of 2,500 (10 bags, 250 ea.)

