


MM MTP(female)-LC fanout cable, OM3 , 12 fibers

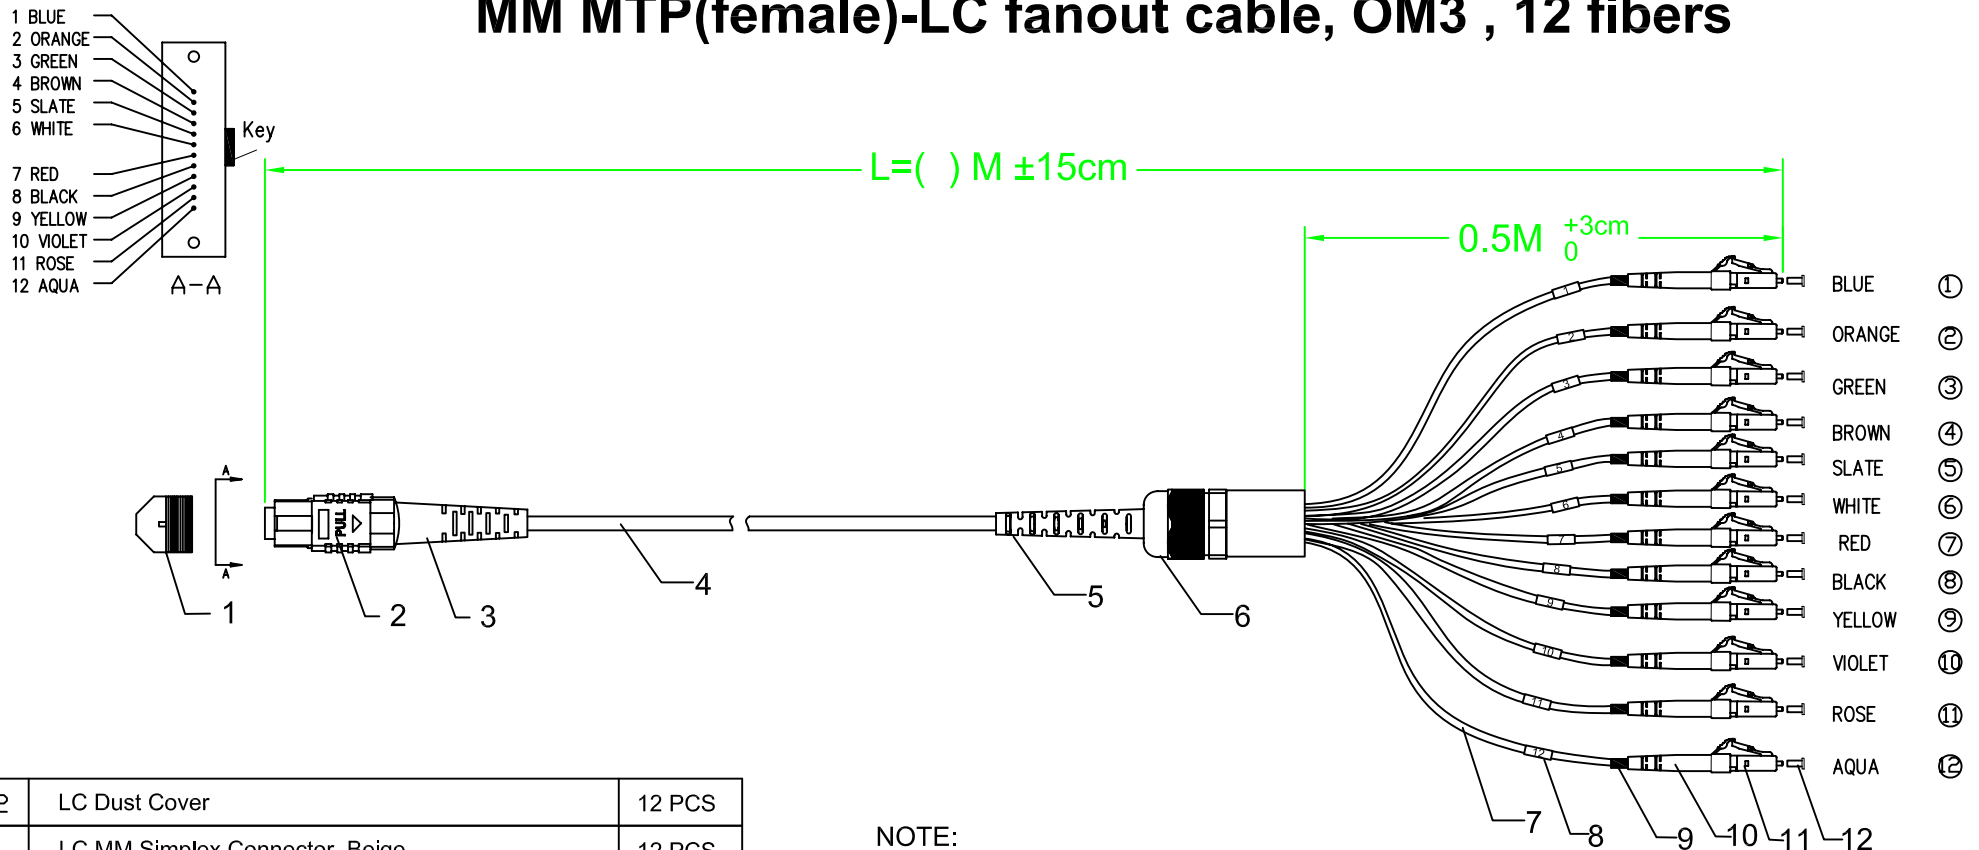

NOTE:

- 1.Insertion loss :Typical MTP≤0.5dB@850nm
LC≤0.2dB@850nm
- Return loss :Typical MTP≥20dB@850nm
- 2.Durability:500 matings
- 3.Operation temperature:-40°C to +85°C
4. MTP connector according to IEC 61754-7
LC Connector according to IEC 61754-20

ROHS
compliant

12	LC Dust Cover	12 PCS
11	LC MM Simplex Connector, Beige	12 PCS
10	LC Boot, White	12 PCS
9	LC Heat Shrink Tubing , White	12 PCS
8	Channel Label	12 PCS
7	OD=2.0 mm aqua Tubing	12 PCS
6	Fanout Kit	1 PC
5	ST 3.0 Boot,Black	1 PC
4	Ø3.0 12Fiber MM 50/125um OM3 Mini Breakout Aqua Cable	
3	MTP Boot , Round Ø3.0	1 PC
2	MM 12MTP(FEMALE) Connector	1 PC
1	MTP Dust Cover	1 PC
ITEM	Description	Q'TY

Description: MM MTP-LC fanout cable ,OM3,12 fibers

Part No:

Drawing No:

Page :1 of 3