



RoHS COMPLIANT

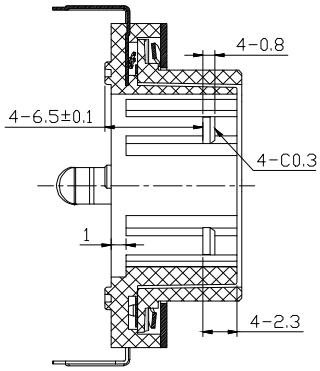



SECTION E-E

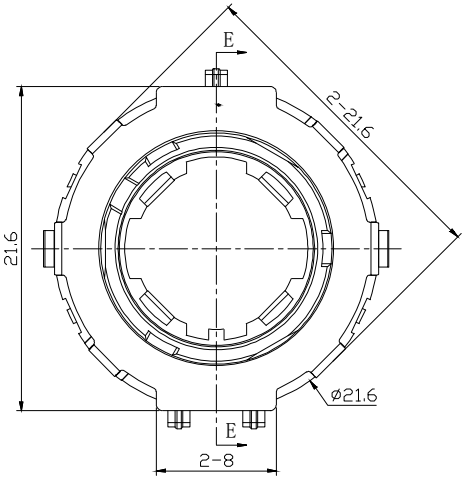

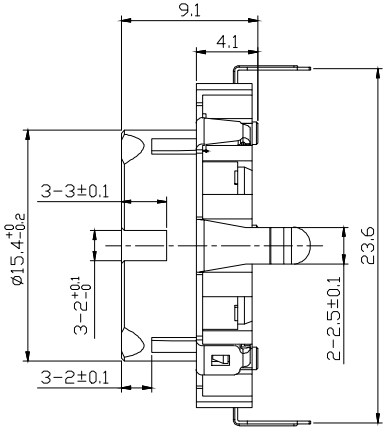


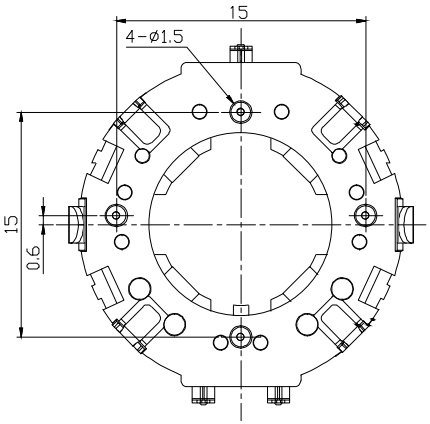

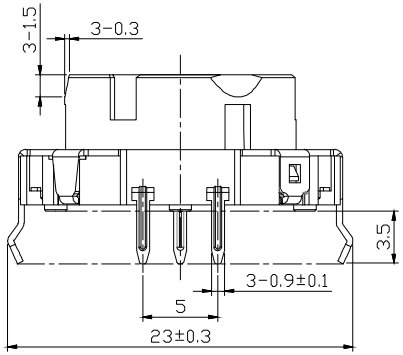




CENTER HOLE DETAIL

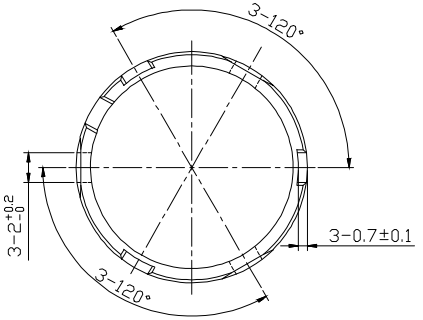

SHAFT DETAIL

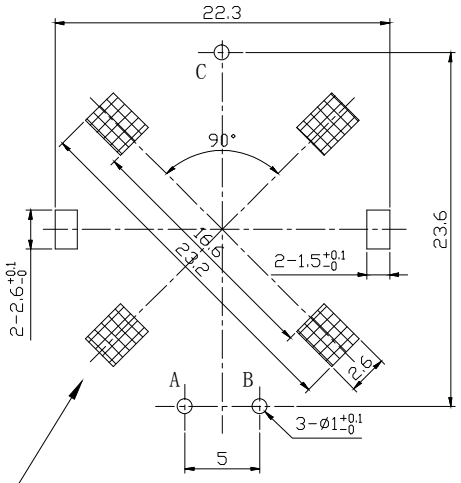

RECOMMENDED PCB LAYOUT

The shaded part cannot be wired

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
   - 1-1. RATING CURRENT: EACH LEAD: 0.5mA
     COMMON LEAD: 1mA
   - 1-2. VOLTAGE RATING: 5V
   - 1-3. DIELECTRIC WITHSTANDING VOLTAGE:
     300V AC FOR ONE MINUTE.
   - 1-4. INSULATION RESISTANCE: 100MΩ MIN.
2. AMBIENT TEMPERATURE RANGE:-30°C~+80°C.

DIM	TOL	DEC	TOL
X.	±0.50	X.°	±2°
X.X	±0.35	X.X°	±2°
X.XX	±0.25	X.XX°	±--
X.XXX	±0.10	X.XXX°	±--

M&T

MTCONN ELECTRONICS CO.,LTD

DRWN: SAM 2018-05-08	PART NO.: MTOH20-00300B-02B55
CHKD: ALAN 2018-05-08	TITLE: ENCODER DIP TYPE
APPD: WILLIAM 2018-05-08	DRAWING NO.: MTOH20-00300B-02B55
SHEET: 1/1	UNIT: mm / SCALE: N/A / SIZE: A4 / REV: B