
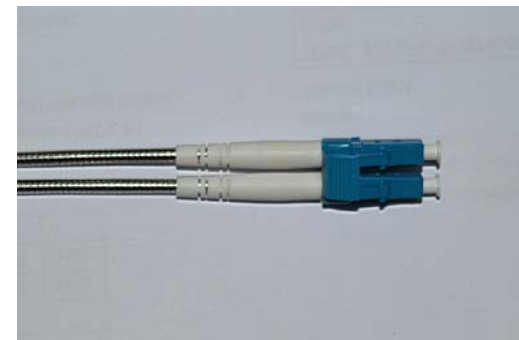


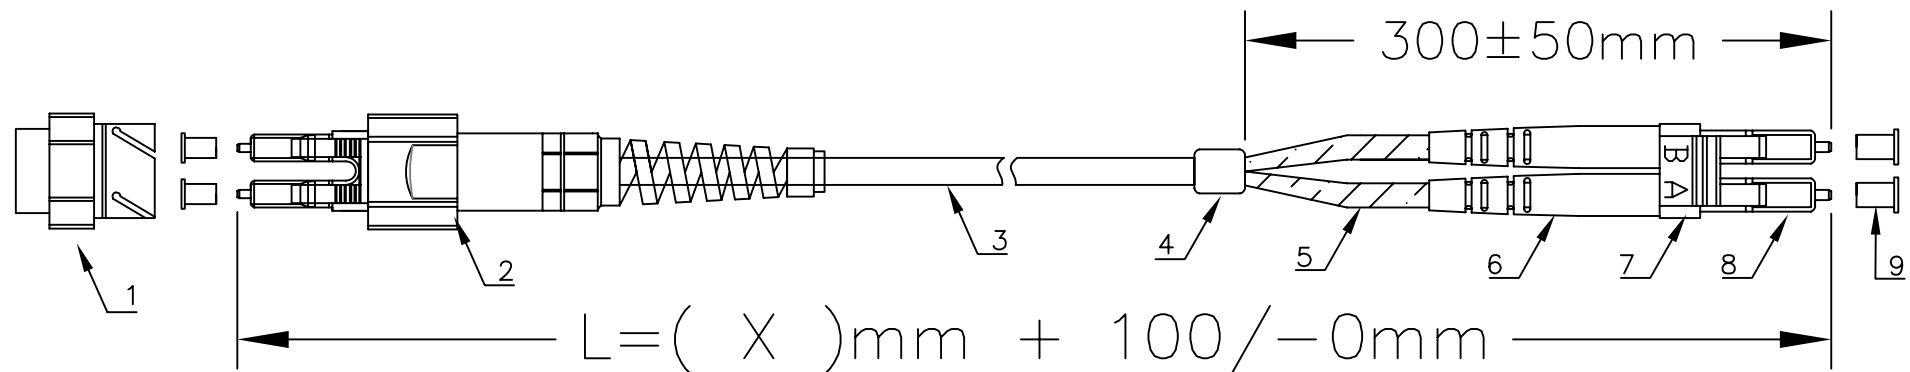

NOTE:

- 1.Insertion loss : $LC \leq 0.30\text{dB}$ $\lambda: 1310\text{nm}$
Return loss : $LC \geq 30\text{dB}$ $\lambda: 1310\text{nm}$
- 2.Durability: 500 matings
- 3.Operation temperature: -40°C to $+85^{\circ}\text{C}$
- 4.LC connector according to IEC 61754-20

ROHS
Compliant

ODVA/UPC-LC/UPC SM DX LSZH 7.0mm		
ITEM	Description	Q'TY
1	ODVA dust cover black	1 PC
2	ODVA SM connector black	1 SET
3	OD=7.0mm 2fibers SM breakout cable black LSZH	1 PC
4	Heat-shrink tubing black & breakout kit	1 PC
5	OD=3.0mm armoured cable tubing L=350mm	2 PCS
6	LC boot white	2 PCS
7	LC clip blue	1 PC
8	LC/UPC SM duplex connector blue	1 PC
9	LC dust cover white	2 PCS



SHEN ZHEN DYS FIBER OPTIC TECHNOLOGY CO.LTD

Designed by:	Haidong Wang	Audit:	Junwu Mei
Date:	2016-1-18	Client:	DYS
Unit:	mm	Sheet:	A4
Drawing NO:	DYS-TI-PC-160118	Approve:	Yong Huang